


## NOTES:

- 1. CONDUIT IS PVC COATED BLACK PIPE, HOT DIPPED GALVANIZED.
- 2. BLUE URETHANE COATING ON INTERIOR OF CONDUIT, .002" (2 MIL) NOMINAL.
- 3. PVC COATING ON EXTERIOR OF CONDUIT, .040" (40 MIL) MINIMUM.
- 4. BLUE URETHANE COATING OVER THREADS.
- 5. COLOR CODED THREAD PROTECTORS ON EACH END.
- 6. A COUPLING IS SHIPPED WITH EACH CONDUIT, PACKAGED SEPARATELY.

| GENERAL NOTES   |  |           |          | Thomas@Betts |  |  |
|---|--|-----------|----------|--------------|--|--|
| 1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS. | www.tnb.com  A Member of the ABB Group |           |          |              |  |  |
|   | DESCRIPTION: DVG COATED COADLUT DIDE   |           |          |              |  |  |
| REVISIONS   | PVC COATED CONDUIT PIPE                |           |          |              |  |  |
| SEE ERN 2018670 FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: 087M001467              |  |           |          |              |  |  |
|   | ORIGINAL PROJECT NO / ( ERN NO )       | SHEET NO: | REV. NO: | DRAWING NO:  |  |  |
|   | RM401793 / ( 2002724 )                 | 1 OF 2    | 4        | WSD-000042   |  |  |

| CATALOG NUMBER | TRADE SIZE | OUTSIDE DIAMETER<br>WITH PVC | WALL THICKNESS<br>WITH PVC | COLOR THREAD PROTECTOR |
|----------------|------------|------------------------------|----------------------------|------------------------|
| COND1/2-X      | 1/2 [16]   | .920 [23.4]                  | .134 [3.40]                | BLACK                  |
| COND3/4-X      | 3/4 [21]   | 1.130 [28.7]                 | .139 [3.53]                | RED                    |
| COND1-X        | 1 [27]     | 1.395 [35.4]                 | .156 [3.96]                | BLUE                   |
| COND11/4-X     | 1-1/4 [35] | 1.740 [44.2]                 | .156 [3.96]                | RED                    |
| COND11/2-X     | 1-1/2 [41] | 1.980 [50.3]                 | .165 [4.19]                | BLACK                  |
| COND2-X        | 2 [53]     | 2.455 [62.4]                 | .172 [4.37]                | BLUE                   |
| COND21/2-X     | 2-1/2 [63] | 2.955 [75]                   | .216 [5.49]                | BLACK                  |
| COND3-X        | 3 [78]     | 3.580 [90.9]                 | .229 [5.82]                | BLUE                   |
| COND31/2-X     | 3-1/2 [91] | 4.080 [103.6]                | .236 [5.99]                | BLACK                  |
| COND4-X        | 4 [103]    | 4.580 [116.3]                | .246 [6.25]                | BLUE                   |
| COND5-X        | 5 [129]    | 5.643 [143.3]                | .264 [6.70]                | BLUE                   |
| COND6-X        | 6 [155]    | 6.705 [170.3]                | .287 [7.29]                | BLUE                   |

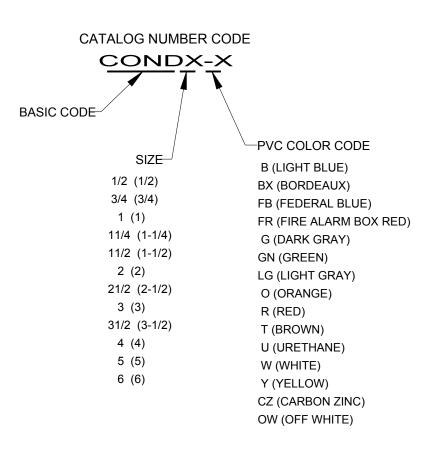

| www.tnb.com  |                         |                     |          | Thomas Betts A Member of the ABB Group |  |
|--------------|-------------------------|---------------------|----------|--|--|
| DESCRIPTION: | PVC COATED CONDUIT PIPE |                     |          |  |  |
|              |                         | SHEET NO:<br>2 OF 2 | REV. NO: | DRAWING NO: WSD-000042                 |  |