

DB-130/200H 08/14/17 Item # 13131

WxDxH

DB-130H 22" x 30" x 53"*

DB-200H 30" x 30" x 53"*

*with 6" legs

DB-130H

Hotel/Motel Ice Dispenser Shown with a KM-340MAH

DB-200H

Hotel/Motel Ice Dispenser Shown with a KML-700MAJ







DB-200H



AQ



CANADIAN ENERGY
PERFORMANCE VERIFIED
RENDEMENT ENERGETIQUE
VERIFIE









| Item #: ______ | Project: ______ | Qty: _____ | AIA#: _____ |

Features

- Ice dispensing area is ADA compliant
- Push-button single auger agitator

DB-130H

- Accommodates KM-340, KM-515, KM-600 or KM-650 series cubers for 281 to 680 lbs. of ice per day
- Built-in 130 lbs. capacity* insulated polyethylene-lined ice storage bin
- Pushbutton single auger agitator dispenses ice at 20 lbs. per minute

DB-200H

- Accommodates KML Series, KM-340, KM-515, KM-600, KM-650 series cubers for 307 to 680 lbs. of ice per day
- Built-in 200 lbs. capacity* insulated polyethylene-lined ice storage bin
- Push-button single auger agitator dispenses ice at 13 lbs. per minute

Warranty:

3 Year Parts & Labor on entire machine. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

* Capacity based on volume x 30 lb/ft3 average density of ice.

Model	Dispensing gear motor	Amperage	Measured Volume	Shipping Weight
DB-130H	60W	1.4	3.7 ft ³	215 lbs.
DB-200H	60W	1.4	5.72 ft³	240 lbs.

Operating Limits

Ambient Temp Range
Voltage Range
45 - 100°F
104 - 132V

Service

• Allow 6" (15 cm) clearance at rear and sides for ease of maintenance and/or service. More space is needed on left side of the dispensing bin to service the drive system.

Plumbing

• Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Vending

· Pushbutton - Standard


Hoshizaki reserves the right to change specifications without notice.



DB-130/200H 08/14/17 Item # 13131


[mm]


FRONT VIEW




SIDE VIEW

REAR VIEW [15.56*] [2.40"] 61

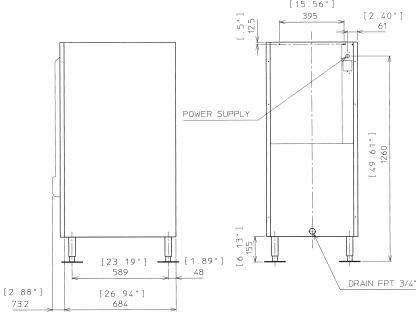



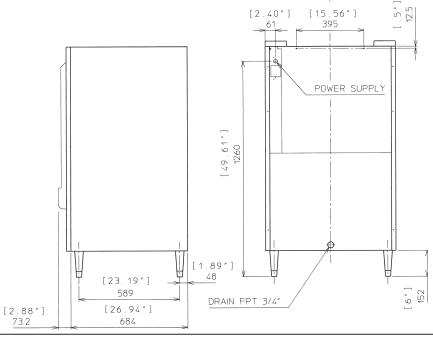

DB-130H & DB-200H Ice Dispenser Opening

