

ITEM NO		
PROJECT		
LOCATION		
DATE	QTY	



DD/DD-CG/DD-L SERIES

Deluxe Ice Cream Dipping/Display Merchandisers

	CURVED	LOW
STANDARD MODELS	GLASS MODELS	GLASS MODELS
□ DD-26	□ DD-26CG	□ DD-26L
□ DD-46	□ DD-46CG	□ DD-46L
□ DD-66	□ DD-66CG	☐ DD-66L
□ DD-88	□ DD-88CG	□ DD-88L

FEATURES

CONSTRUCTION

- Attractive, contemporary design
- 24 gauge painted textured interior and exterior
- Equipped with leveling legs to correct for unlevel flooring situations
- Rear air intake and discharge eliminates front grille and allows full front of cabinet for graphics
- Independent on/off compressor and light switch
- Stainless steel top and attached superstructure
- Tempered plate glass viewing window
- Drain with garden hose connector for ease of cleaning
- Brilliant, interior fluorescent lighting
- Stainless steel serving deck
- Top and side lid wiper gaskets
- Heavy-duty epoxy-coated wire can support racks

- 9 ft. long cord with molded plug
- 2¹/₄" foamed-in-place "zero ODP" urethane insulation
- Number and length of interior light fixtures:
 - DD-26/26CG/26L...(1) 18"
 - DD-46/46CG/46L...(1) 36"
 - DD-66/66L.... (1) 18", (1) 36"
 - DD-66CG.....(2) 18"
 - DD-88/88CG/88L...(2) 36"

LIDS

 Hinged, high-tensile, transparent acrylic dipping compartment lids with full length handle

REFRIGERATION

- Refrigerant:
 - DD-26/26CG/26L,DD-46/46CG/46L....R-134a
 - DD-66/66CG/66L,DD-88/88CG/88L...R-404A
- Cold wall evaporator

- Low maintenance bare tube condenser coil on all models except DD-26/26CG/26L
- No minimum clearance required on cabinet sides but front, back and top must be left open for customer and operator access
- Temperature range: 5° to -5°F (-15° to -21°C)
- R-factor (insulation efficiency rating): 19.40


WARRANTY


- Standard limited two year parts and labor
- Additional three year coverage on compressor part



OPTIONS

- ☐ Rear service doors for DD-46, DD-66 and DD-88 models (factory installed)
- ☐ Custom colors
- ☐ Removable can holders with white overnight can covers
- ☐ Dipper well
- ☐ Removable frost shields
- ☐ Leg kit
- ☐ Casters
- ☐ Lid locking kit (less locks)
- ☐ Flavor identification tabs (for DD and DD-CG models only)



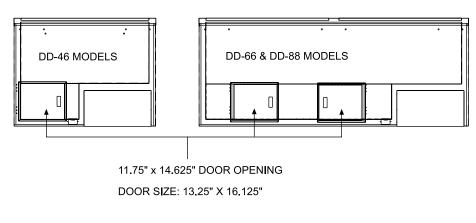

REAR SERVICE DOOR FOR DD-46, DD-66 AND DD-88








LID LOCKING KIT



CAN HOLDERS





FLAVOR IDENTIFICATION TAB


TECHNICAL SPECIFICATIONS

	DIMENSIONS (in.)		DIMENSIONS (mm)				UNIT	CAN CAP.** DISPLAY/	CAP.	SHIP	SHIP WT.		
MODEL	L	D	H	L	D	H	VOLTS	AMPS	H.P.	STORAGE	CU. FT.*	CU. FT.	LB/KG
DD-26/26CG/26L	261/2	273/4	*	673	705	*	115	7.4	1/3	4/0	3.5	38.0	240/109
DD-46/46CG/46L	473/4	273/4	*	1213	705	*	115	7.5	1/2	8/4	9.6	54.0	370/168
DD-66/66CG/66L	691/4	273/4	*	1759	705	*	115	9.7	1/2	12/8	16.0	76.0	495/225
DD-88/88CG/88L	903/4	273/4	*	2305	705	*	115	11.5	3/4	16/12	22.5	97.0	600/273


^{*}Height of standard and low glass models: 50" (1270mm), curved glass models: 52" (1321mm). **Capacities in 91/2" diameter, 3 gallon cans. †Measured to the load line level.








PLAN VIEW




SIDE VIEW

STANDARD & CURVED GLASS ELEVATION VIEW



CURVED GLASS SIDE VIEW

LOW GLASS ELEVATION VIEW



SIDE VIEW

LISTINGS



HOOKUP

Via plug in, 9 foot long, flexible 3 wire 14/3 cord with molded plug. Drain hookup has standard garden hose connection.



BID SPECIFICATIONS

Item no. DD	
Provide()	
Deluxe Ice Cream Dipping/Dis-	
play Merchandiser(s), Master-Bi	lt®
model no. DD	

Cabinet will feature textured finish on interior and exterior. Cabinet to be provided with independent on/off compressor and light switch, drain connection, stainless steel top and superstructure, tempered plated glass viewing window and interior fluorescent lighting. Cabinet is to have rear air intake and discharge. Standard leveling legs provided to correct for unlevel flooring situations. Hanging frost shields with mounting screws offered as an option (consult your Master-Bilt® representative for additional options).

Cabinet will be provided with 9 foot cord and molded plug.

DD-26/26CG/26L and DD-46/46CG/46L will use R-134a refrigerant while DD66/66CG/66L and DD-88/88CG/88L will use

R-404A refrigerant. The temperature range will be 5° to -5°F (-15° to -21°C). All models except DD-26/26CG/26L to be supplied with a refrigeration system containing low maintenance bare tube condenser coil.

Cabinet to have standard limited two year parts and labor with additional three year coverage on compressor part.

Cabinet to be UL, C-UL and NSF listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.

