



UNDERCOUNTERS

UNDERCOUNTER MODELS 9400 & 9300

Self-contained refrigerated work top unit with back-mounted removable, replaceable, R-134a (refrigerator), R-290 (freezer) refrigeration system.

PROJECT NAME:

LOCATION:

ITEM NO:

QTY:

MODEL NO:

AIA NO:

SIS NO:

CSI SECTION: 11400

AVAILABLE MODELS:

REFRIGERATORS:

- 9404-7
- 9404-7R
- 9404-7DW
- 9404-32-7
- 9404-32D-7
- 9301-7

FREEZERS:

- 9404F-290
- 9404F-32-290
- 9404F-290R
- 9404F-DW-290
- 9301F-290

STANDARD FEATURES:

- Self-contained, removable, replaceable refrigeration package that utilizes “CFC free” R-134A (refrigerant) and R-290 (freezer)
- “Front Breathing” (on legs/casters) refrigeration system, no side or back clearance required. Integrated rubber bumpers provide 1” rear clearance on model 9301F-290.
- 6” casters standard on 9404F-290 & 9301F-290 (no legs optional)
- Refrigerators will have a hot gas condensate removal
- Freezers will have a condensate drip pan mounted on the bottom of the unit

CABINET EXTERIOR: The top, sides, and front are stainless steel. Cabinet top to be one piece die-formed 20 gauge stainless steel with 1 1/2” high square nosing. Exterior sides, and die-stamped front louver panel extend to 1/4” AFF. Bottom and back of unit are corrosion resistant steel. Door openings to be ABS and contain magnetic strip for positive sealing of gaskets. Drawer fronts to be 24 gauge stainless steel with 16 gauge stainless handle, magnetic gasket, ABS interior liner and foamed in place

insulation. Work surface to be at 36” work height with unit on standard 2 1/2” high casters (front two with locks). 9404-7 & 9301-7 with (legs or casters) reference model.

CABINET INTERIOR: Interior of cabinet is fully coved to meet N.S.F. standard #7. The Interior bottom, back, and top are anodized aluminum with coved corners for easy clean-up. The interior ends are ABS. Unit insulated with a minimum of 2.5” of CFC free, foamed in place polyurethane. Each drawer contains two 12” x 20” x 6” deep polycarbonate pans - pans are removable without removing drawer tracks. Drawer tracks are 14 gauge stainless steel with 1 5/16” stainless steel ball bearings, self-closing and removable.

DOORS: Stainless steel front with easy to grasp recessed handles, mounted on heavy duty concealed hinges. Hinges are all stainless steel with bronze pivot pin in nylon bushing, spring loaded to be self-closing. Door with foamed in place insulation, press fit magnetic gaskets - (designed for installation & removal without tools), and deep draw ABS interior liner for maximum insulation value.

REFRIGERATION: CFC free, R-134a (refrigerators), R-290 (freezer) back-mounted refrigeration system to be self-contained with evaporator blower coil, compressor, thermostatic control, forced-air condensing coil and capillary tube contained in removable assembly. Condensate drip pan provided (freezer units only). Units totally prewired and to be supplied with 8’ cordset (NEMA 5-15P) for 115V operation. “Front Breathing” refrigeration system, requires no side or back clearance. Integrated rubber bumpers provide 1” rear clearance on model 9301F-290.

ORIGIN OF MANUFACTURE: Designed and manufactured in the United States.

Model 9404-7 shown.





OPTIONS/ACCESSORIES:


- Stainless steel backs
- Overshelves (single & double tier)
- Backsplash

9404-7/9404F-290 & 9301-7/9301F-290 Only:

- Casters (see chart on back)
- Drawers

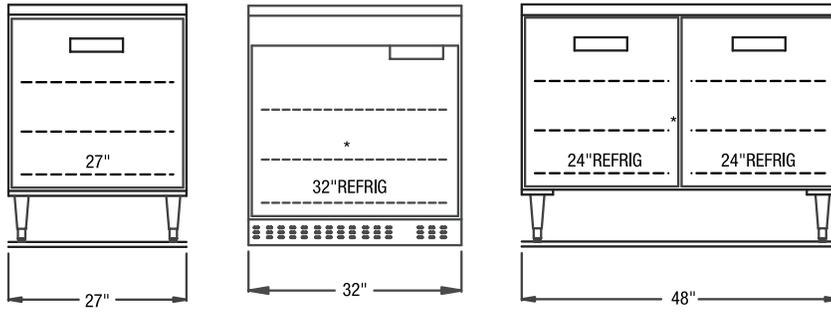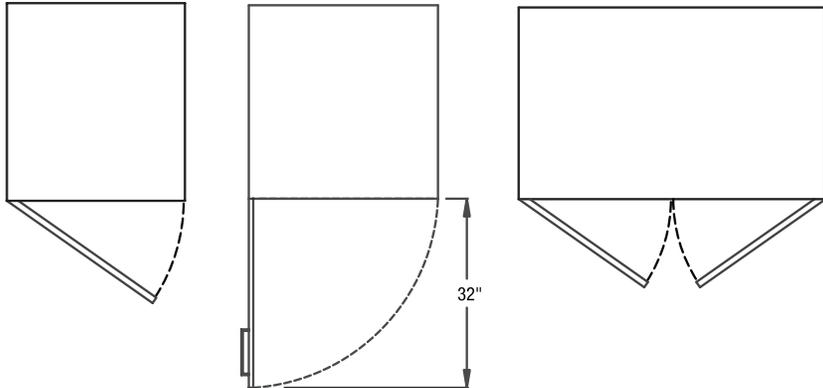

9404-7 9404-32-7 & 9404F-32-290 9301-7

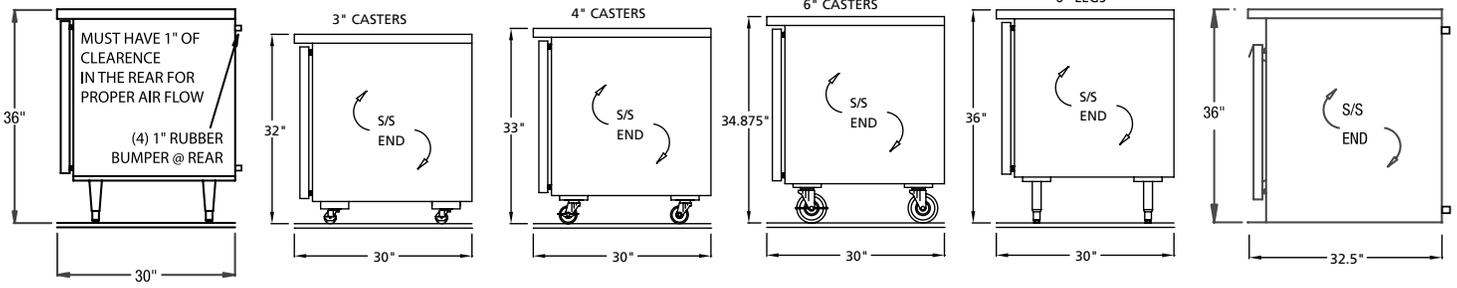

9404-7 9301-7 FOR 9404-7/9301-7 SERIES 9404F-290 & 9301F-290 (6" casters standard - no legs available) 9404-32-7 & 9404F-32-290