

Fusion

Product Specifications

ITEM NO: _____
PROJECT: _____
DATE: _____

Refrigerated Self-Service Single Deck Case



MODEL SHOWN GLDSS4R

NOTE: SHOWN W/ OPTIONAL CUTAWAY END PANEL

- ☐ GLDSS4R
- ☐ GLDSS5R
- ☐ GLDSS6R
- ☐ GLDSS8R

Lengths include 1-1/8" end panels
51"L x 47-7/8"D x 34-1/2"H
62-7/8"L x 47-7/8"D x 34-1/2"H
75-3/8"L x 47-7/8"D x 34-1/2"H
99-3/4"L x 47-7/8"D x 34-1/2"H

STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Corrosion resistant stainless steel tub & fan shroud
- Integrated average product temperature of 40°F or less
- One year parts & labor; 5 year compressor warranty

Features	Standard	Options
EXTERIOR COLOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Stainless steel
INTERIOR COLOR	☐ Black	☐ Stainless steel ☐ White
REAR EXTERIOR COLOR	☐ Stainless steel	☐ Painted - Black ☐ Painted - White
BASE	☐ Casters w/ levelers (n/a w/ remote ref.)	☐ 6"H legs (n/a w/ remote ref.)
END PANEL LEFT	☐ Full end panel w/mirror interior	☐ Cutaway w/acrylic end panel ☐ No end panel (for same case to case connect)
END PANEL RIGHT	☐ Full end panel w/mirror interior	☐ Cutaway w/acrylic end panel ☐ No end panel (for same case to case connect)
LOWER FRONT PANEL	☐ Painted - Black	☐ Stainless steel
UPPER REAR LEDGE	☐ Black Sanalite®	☐ Solid surface (specify color) ☐ Stainless steel ☐ White Sanalite®
ELECTRICAL CONNECT	☐ 6' straight blade power cord (self-cont.)	☐ 6' locking power cord (self-cont.) ☐ Electrical leads (remote)
REFRIGERATION	☐ Breeze™ w/EnergyWise s/c refrigeration	☐ NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs. ☐ Note: Remote doesn't incl Conds unit. Floor drain reqd. ☐ Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		☐ Refrigerated rear storage (remote only) w/ sneeze guard ☐ Second year parts & labor warranty (excludes compressor)
ACCESSORIES		☐ 2"H Full depth display riser(s) ☐ Clean Sweep® coil cleaner (n/a w/remote)

Fusion

Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone **Intended Product To Be Displayed**




All Packaged refrigerated products

Warmest Avg Prod Temp ° F

40

PLAN VIEW

SIDE VIEW

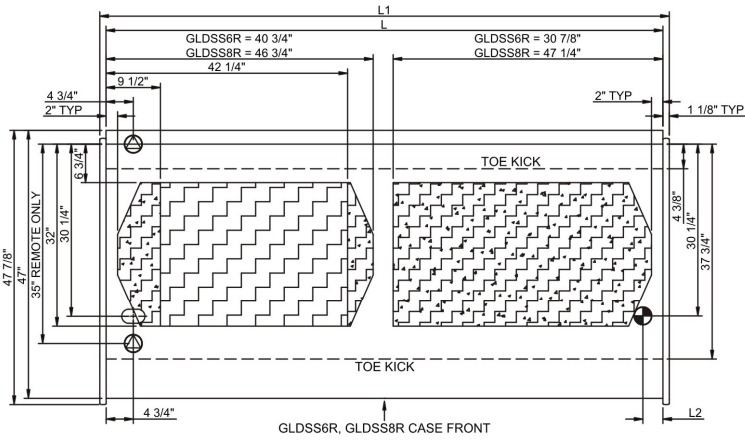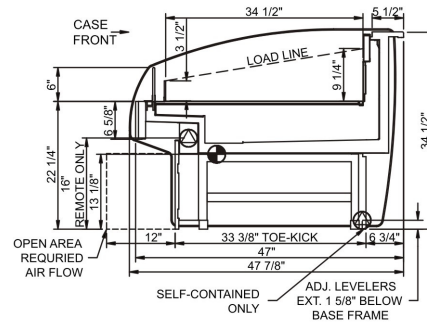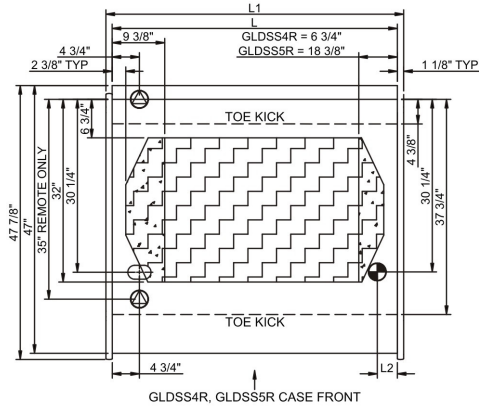

NOTE: ALL DIMENSIONS APPROXIMATE

⊗ ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).

⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.

⊞ REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.

⊞ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Est Wt
GLDSS4R	48.75	51.00	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	6	2+G	Leads Multiple	N/A	N/A	750
				Remote (Type I)	Circuit #1	110-120	1	60	0.48	36	2+G	Leads Multiple	20.00	2700	
				Self-Contained	Circuit #1	110-120	1	60	12.00	1,167	2+G	5-20P or L5-20P	N/A	N/A	
GLDSS5R	60.63	62.88	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	8	2+G	Leads Multiple	N/A	N/A	950
				Remote (Type I)	Circuit #1	110-120	1	60	0.71	42	2+G	Leads Multiple	20.00	3495	
				Self-Contained	Circuit #1	110-120	1	60	15.07	1,385	2+G	5-20P or L5-20P	N/A	N/A	
GLDSS6R	73.13	75.38	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	10	2+G	Leads Multiple	N/A	N/A	1,000
				Remote (Type I)	Circuit #1	110-120	1	60	0.89	63	2+G	Leads Multiple	20.00	4050	
				Self-Contained	Circuit #1	110-120	1	60	15.25	1,405	2+G	5-20P or L5-20P	N/A	N/A	
GLDSS8R	97.50	99.75	3.50	Optional Skirt Light	Circuit #1	110-120	1	60	0.70	13	2+G	Leads Multiple	N/A	N/A	1,100
				Remote (Type I)	Circuit #1	110-120	1	60	1.33	115	2+G	Leads Multiple	20.00	5450	
				Self-Contained	Circuit #1	110-120	1	60	15.69	1,458	2+G	5-20P or L5-20P	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF 7

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Units are supplied with levelers. They must be adjusted during installation to ensure units is level and plumb. Dimensions reflect levelers extended 1 1/4".



In Accordance with
AHRI Std 1200

DOE 2017
 Energy Efficiency
 Compliant

888 E. Porter Rd.
 Muskegon, MI 49441
 Ph. 231-798-8888
 Fx. 231-798-4960
www.structuralconcepts.com

Note: Information is subject to change at any time.
 Visit www.structuralconcepts.com for the most current specs.

Revised 3/21/2018

20029600

