

Cleveland

SteamCraft® Ultra 5

COUNTER TYPE DESIGN, PRESSURELESS CONVECTION STEAMER, ELECTRIC STEAM GENERATOR, 16 KW

Project _____
Item _____
Quantity _____
FCSI Section 11400 _____
Approved _____
Date _____

Steamcraft® Generator Style High Speed Convection Steamers

Models

- 21-CET-16



Shown with optional Stand and Cafeteria pans

Standard Features

- Cooking Capacity for up to five 12" x 20" x 2 1/2" deep Cafeteria Pans.
- Innovative PowerPak Electric Steam Generator: Two Special Stainless Steel Fire Bar Heating Element. Strong 14 Gauge Stainless Steel Construction. Large 5 gallon generator reservoir for faster steam cooking production. Fully insulated rear mounted steam generator.
- Easy Access Cleaning Port: Generator Cleaning Port located on the outside, top of the unit. Not necessary to remove hot panels or pan rack guides.
- Instant Steam Stand By Mode: Hold generator at a steaming temperature. Allows unit to start cooking instantly.
- Durable 14 Gauge, Stainless Steel Construction: For cavity and steam generator.
- Easytimer with 99 minute Digital Readout in minutes and seconds. Selector Dial with LED Light Descale Indicator. Sure Cook load compensating timer. Manual Constant Steam Mode.
- Main Power On/Off Switch: With Automatic Water Fill.
- Exclusive Steam Cooking Distribution System: Maintenance Free Exclusive Brass Steam Jets produce a high velocity convection steam without fans. Coved Corner design in cooking compartment distributes heat evenly, and is easy to keep clean. Creased top & bottom enhance drainage. Cold water condenser behind drain maintains a dry steam. Fully Insulated cooking compartment for thermal efficiency. Removable Stainless Steel Slide Racks for easy cleaning.
- Automatic Generator Drain: Contains a "Water Jet" Spray Rinse Drain Cleaning Cycle to keep drain clear.
- Exclusive Automatic Remote Probe Type Water Level Control: Separate from the generator for easy access.
- Exclusive "Cool to the Touch" Two-Piece Compartment Door Design: Free floating inner door with reversible gasket provides an air tight seal. Stainless Steel Slam/Latch Door Latch mechanism for reliability.
- Left Hand Door Hinging: Compartment Doors hinged on the left, controls on the right.
- Available in most voltages, three phase only.
- 4" Adjustable Legs

Short Form Specifications

Shall be CLEVELAND, SteamCraft® Ultra 5, one compartment, Counter-Type Steamer, Model 21-CET-16, ___volts, 16.5 KW, ___Hz, 3 phase, heavy duty all Stainless Steel construction; rear mounted, insulated Steam Generator with Remote Probe Type Water Level Controls and Automatic Steam Generator Blowdown with "Water Jet" Drain Cleaning feature.


Options & Accessories

- 34" (864mm) High Stainless Steel Economy Stand, for one 21-CET-16 (UniStand34)
- POSK Pull-Out Shelf Kit for UniStand (P/N 111724)
- URK Pan Rack Kit UniStand (P/N 111726)
- Equipment Stacking Stand Shelf Type (E52446)
- Dissolve® Descale Solution, 6 one gallon container w/quart markings (106174)
- Cafeteria Pans in depths of 1", 2 1/2" and 4"
- Water Filters
- Right Hand Door Hinging (DHR)


KE004046-10

Cleveland


Steamcraft® Generator Style High Speed Convection Steamers

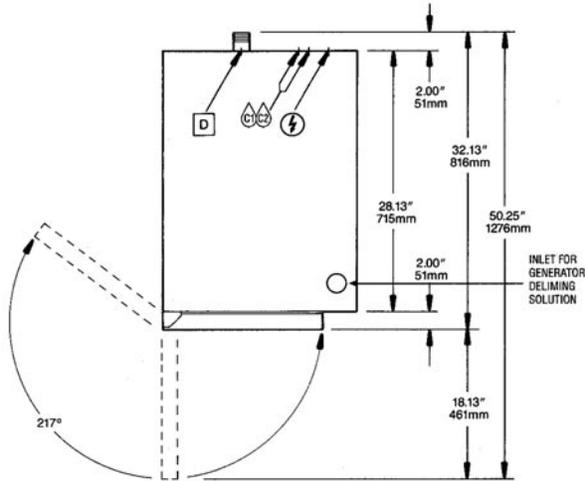


TOP VIEW

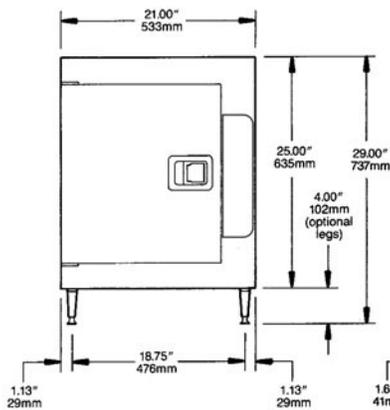

FRONT VIEW

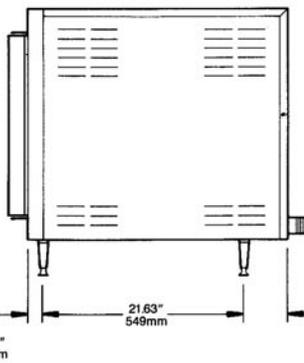

RIGHT SIDE VIEW

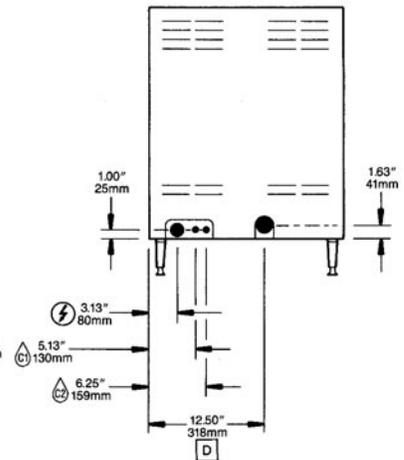

REAR VIEW

COMPARTMENT HAS CAPACITY FOR:

- Five, 12" x 20" x 2 1/2" deep Cafeteria Pans

WATER QUALITY REQUIREMENTS (Boilers, Generators)

| | |
|--------------------------|--------------------------|
| TDS: | 50-250 ppm |
| Hardness: | 50 - 200 mm (3 - 12 gpg) |
| pH value: | 7.0 - 8.5 |
| CL (Chloride): | max 50 ppm |
| Cl2 (free chlorine): | max 0.1 ppm |
| SiO2 (silica): | max 13 ppm |
| NH2Cl: (mono-chloramine) | max 0.1 ppm |
| Total Alkalinity: | 50 - 100 ppm |

SHIPPING WEIGHTS & DIMENSIONS

| | | | |
|---------|-------|-------|--------|
| Weight | Width | Depth | Height |
| 248 lbs | 30" | 35" | 36" |

| ELECTRIC ⚡ | | | | | WATER 💧 | | DRAINAGE 🗑️ | | CLEARANCE | |
|------------|--------|----|------|------|---|--|---|--|---|--|
| Volts | Watts | Ph | Amps | Wire | Cold water: 35 psi min., 60 psi max. | | 1 1/4" N.P.T. IPS-M | | Right - 3", Left - 3", Rear - 3" (12" on control side if adjoining wall or equipment is over 30" high for service access) | |
| 208 | 16,300 | 3 | 45.9 | 3 | Two 3/4" NH-F (Garden Thread) Connections. Use NSF approved hose. | | Do not connect other units to this drain. | | Contact factory for variances to clearances. | |
| 220 | 13,694 | 3 | 36.5 | 3 | C1 one for Condenser | | Drain line must be vented. | | | |
| 240 | 16,300 | 3 | 39.8 | 3 | C2 one for Steam Generator | | No PVC pipe for drain. | | | |
| 440 | 13,694 | 3 | 18.2 | 3 | | | | | | |
| 480 | 16,300 | 3 | 19.9 | 3 | | | | | | |
| 360 | 14,621 | 3 | 23.8 | 4 | | | | | | |
| 380 | 16,300 | 3 | 25.1 | 4 | | | | | | |
| 415 | 16,300 | 3 | 23.0 | 4 | | | | | | |

NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted. Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes. Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L./NSF#4.

(NOT TO SCALE)

760 Beta Drive, Unit D
Mayfield Village, Ohio 44143

Tel 1.216.481.4900
Fax 1.216.481.3782
Email steam@clevelandrange.com

www.clevelandrange.com
Section 3, Page 4
11 / 23

Timeless Quality, Trusted For Life®