


Stranded Tinned Copper, Twisted Pairs, Low-Smoke PVC Jacket

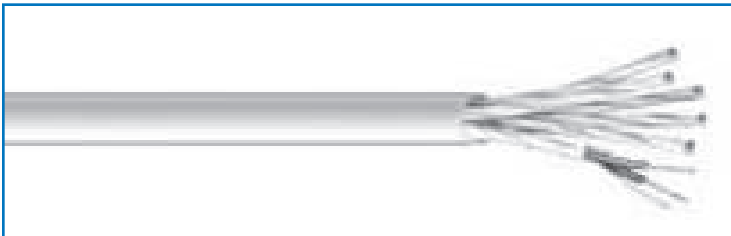

Product Construction

Conductor:

- Stranded tinned copper with overall foil shield

Insulation:

- Foam fluorocopolymer

Shield/Drain:

- Individual aluminum/polyester foil shield with 100% coverage

Jacket:

- Orange low-smoke PVC

Applications

- Used for computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise
- Features include low dielectric constant and a dissipation factor for high speed, low distortion data handling
- Physical properties include good crush resistance and light weight

Standards

- CMP/CL2P
- 75°C temperature rating

COLOR CODE CHART	
Pairs	Color
1	Black & White

Part #	AWG	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Nom O.D.	Nominal Capacitance	Lbs./M'
G62401	24	1	7x32	.015"	.014"	.134"	11.8 pF/ft.	11.3

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.