


## Multi-Conductor; 300 Volt, Aluminum Shield; 60°C, Polyethylene Insulation

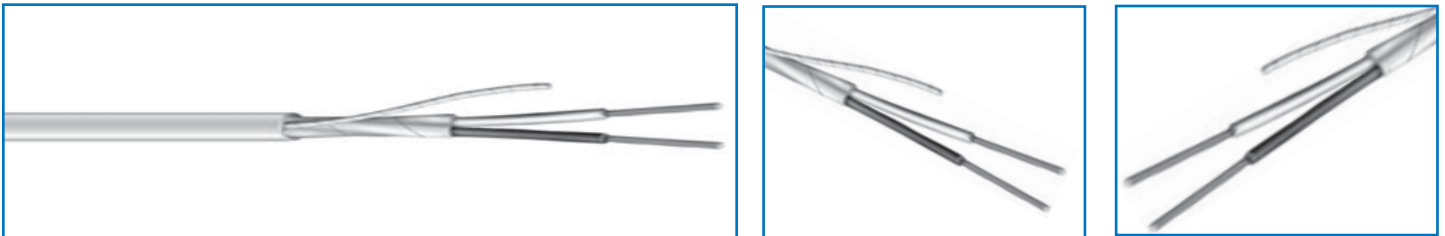

### Product Construction

Conductor:

- tinned copper

Insulation:

- Polyethylene Insulated, Conductors cabled

Shield/Drain:

- Aluminum-polyester shield
- Tinned copper drain wire with 100% shield coverage

Jacket:

- Gray PVC Jacket

### Applications

- Used for computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise

### Standards

- UL Rated 60°C
- Voltage: UL 300 Volt

COLOR CODE CHART	
Cond. #	Color
1	Black
2	Clear
3	Red

Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom O.D.	Lbs./M'
D12003	20	3	7x28 TC	.016"	.033"	.21"	25

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.