




Stranded Multi-Conductor, Overall Aluminum Shield, S-R Insulation-300 Volt

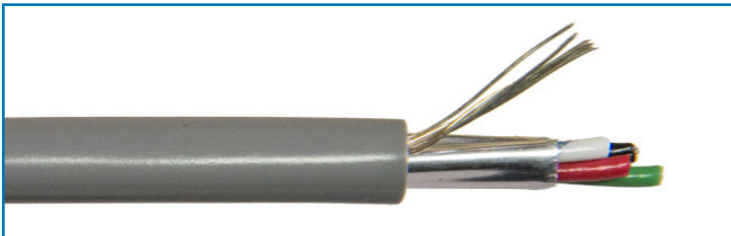

Product Construction

Conductor:

- Tinned copper

Insulation:

- SR-PVC with cabled conductors

Shield/Drain:

- Aluminum polyester shield
- Tinned copper drain wire with 100% shield coverage

Jacket:

- Gray PVC

Standards

- UL 444
- UL 758
- UL 1581
- NEC Article 800
- UL Rated - 80°C
- Voltage: UL 300 Volt

COLOR CODE CHART			
Cond.#	Color	Cond.#	Color
1	Black	8	Yellow
2	Red	9	Purple
3	White	10	Gray
4	Green	11	Pink
5	Brown	12	Tan
6	Blue	13	Red/Black Stripe
7	Orange	14	White/Black Stripe
		15	Green/Black Stripe

Computer Cables



Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom O.D.	Lbs./M'
D22004	20	4	7x28 TC	.010"	.032"	.231"	31.7
D22006	20	6	7x28 TC	.013"	.032"	.276"	52
D22008	20	8	7x28 TC	.013"	.032"	.248"	50.6
D22010	20	10	7x28 TC	.010"	.032"	.264"	60
D22012	20	12	7x28 TC	.010"	.032"	.283"	69.6
D22015	20	15	7x28 TC	.016"	.032"	.393"	105

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.