


Composite Cable, 75°C, 300 Volt, Non-Plenum Rated, CMR

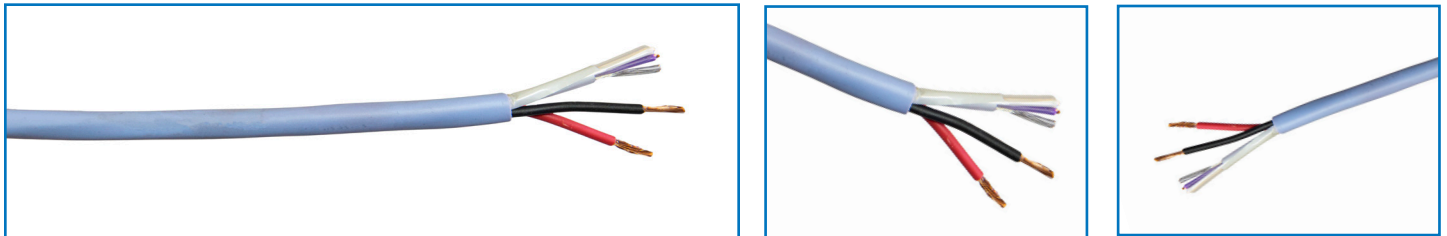

Product Construction

Construction:

- 2 Parts:
- 22AWG stranded BC 1 PAIR, Shielded
- 18 AWG 41 strand BC 2 C, Unshielded

Conductor:

- Stranded Bare Copper

Insulation:

- 2 Parts:
- 22 AWG DATA PAIR: Foam Polyethylene
- 18 AWG POWER: PVC

Shield/Drain:

- (DATA PAIR) Foil shield, foil in; 24 AWG stranded tinned copper drain wire

Jacket:

- PVC; Light blue with green line

Applications

- Wiring for keypads and touch-panel controls and other human interface device
- Compatible with Lutron lighting systems

Standards

- 75°C, 300 Volt
- UL Type CMR
- RoHS Compliant

Part #	AWG	Nom. O.D.	Lbs./M'
LT1-346S-4	MULT	.213"	40

Note: The information in this specification sheet is approximate and subject to standard industry and manufacturer tolerances. Please verify specific requirements with your Omni Cable account manager.