


Multi-Conductor-300 Volt, Overall Aluminum Shield, Polyethylene Insulation

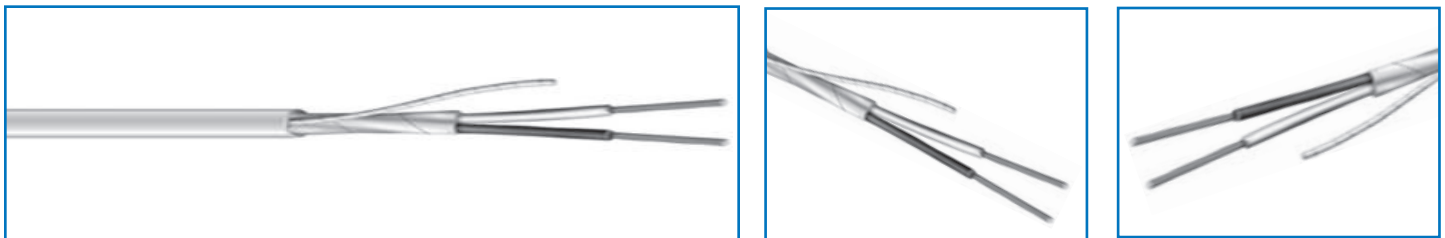

Product Construction

Conductor:

- Stranded tinned copper

Insulation:

- Polyethylene Insulated, twisted Pair

Shield:

- 100% aluminum/polyester with stranded tinned copper drain wire

Jacket:

- Gray PVC

Applications

- Paired cables allow balanced signal transmission which results in lower crosstalk through common mode rejection
- Due to the improved noise immunity of twisted pairs, they generally permit higher data speeds than multi-conductor cables

Standards

- CEC CM CL2
- CEC CM
- 300 Volt Rated (AWM 2107 at 600V)
- 80°C rated

COLOR CODE CHART

Cond. #	Color
1	Black
2	Clear
3	Red

Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
D11603	16	3	19x29 TC	.031"	.031"	.33"	59

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.