


Paired-Unshielded, Stranded Conductors, PVC Insulation-300 Volt/600 Volt

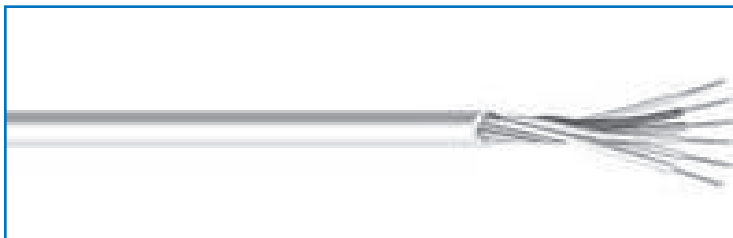

Product Construction

Conductor:

- Tinned copper
- 2 & 3 conductors-300 Volt
- 4+ conductors-600 Volt

Insulation:

- PVC Insulated, twisted Pair

Jacket:

- Gray PVC

Applications

- Allow balance signal transmission which results in lower crosstalk through common mode rejection
- Permits higher data speeds than multi-conductor cable

Standards

- UL Listed: 90°C
- Voltage: 600 Volt rating

COLOR CODE CHART	
Pairs	Color
1	Black
2	White

Part #	AWG	Conductors	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
D91202	12	2	1	65x30 TC	.032"	.035"	.386"	85

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.