


Stranded Multi-Conductor, Overall Aluminum Shield, S-R Insulation-300 Volt

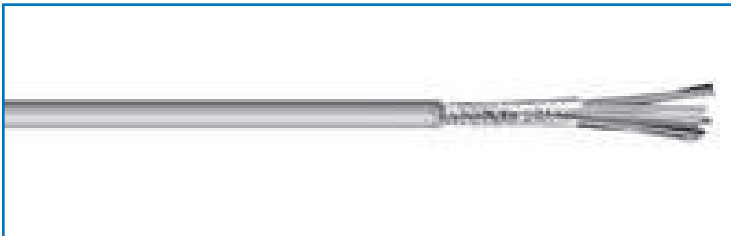

Product Construction

Conductor:

- Stranded tinned copper multi-conductors

Insulation:

- S-R PVC insulated with cabled conductors

Shield:

- Aluminum polyester shield with stranded tinned copper drain wire

Jacket:

- Gray PVC jacket

Standards

- UL Rated - 80°C
- Used for EIA RS-232 Applications
- UL NEC CL2, Passes VW-1 vertical wire flame test
- Voltage: UL 300 Volt

Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom O.D.	Lbs./M'
D22204	22	4	7x32	.010"	.032"	.188"	26.3
D22206	22	6	7x32	.010"	.032"	.214"	35.3
D22208	22	8	7x32	.010"	.032"	.237"	45
D22210	22	10	7x32	.010"	.032"	.260"	51.1
D22212	22	12	7x32	.010"	.032"	.281"	54.2
D22215	22	15	7x32	.010"	.035"	.303"	69.4
D22220	22	20	7x32	.010"	.035"	.333"	87.5
D22225	22	25	7x32	.010"	.035"	.375"	101

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.

Color Code: Vendor specific, please refer to vendor spec.