


## Multi-conductor, Unshielded-300 Volt, PVC Insulation-60°C

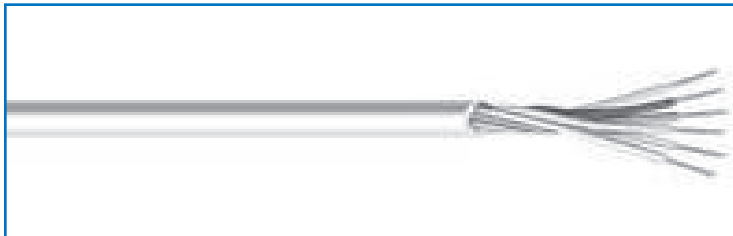

### Product Construction

Conductor:

- Tinned copper

Insulation:

- PVC insulated with cabled conductors

Jacket:

- Gray PVC

### Applications

- Applications include computers, communications, instrumentation, sound, control, audio, and data transmission
- Designed to protect signal integrity under critical conditions by reducing hum, noise, and crosstalk

### Standards

- Voltage: 300 Volt
- UL Listed: 60°C

COLOR CODE CHART			
Cond.#	Color	Cond.#	Color
1	Black	7	Orange
2	White	8	Yellow
3	Red	9	Purple
4	Green	10	Gray
5	Brown	11	Pink
6	Blue	12	Tan

# Instrumentation Cable



Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
D91802	18	2	7x26 TC	.014"	.032"	.188"	17
D91803	18	3	19x30 TC	.017"	.032"	.235"	34.8
D91804	18	4	19x30 TC	.017"	.032"	.254"	39
D91805	18	5	19x30 TC	.017"	.033"	.282"	60
D91806	18	6	19x30 TC	.017"	.033"	.289"	60
D91807	18	7	19x30 TC	.017"	.037"	.314"	81
D91808	18	8	19x30 TC	.017"	.037"	.339"	79.9
D91809	18	9	19x30 TC	.017"	.037"	.364"	87.7
D91810	18	10	19x30 TC	.017"	.040"	.367"	97.9
D91812	18	12	19x30 TC	.017"	.040"	.412"	131.4
D91815	18	15	19x30 TC	.017"	.045"	.500"	175
D91819	18	19	19x30 TC	.017"	.045"	.490"	198
D91820	18	20	19x30 TC	.017"	.045"	.496"	183.6
D91825	18	25	19x30 TC	.017"	.060"	.550"	211.6

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.

\*Ring Band Stripping