




Multi-Conductor-300 Volt, Overall Braid Shield-75°C, PVC Insulation

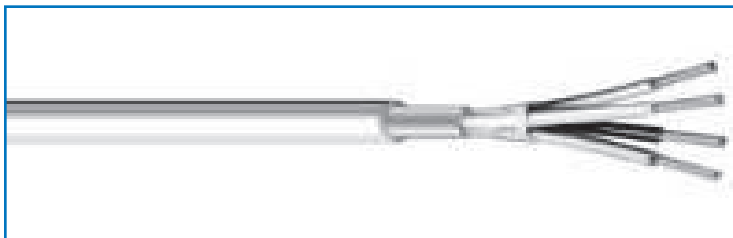

Product Construction

Conductor:

- Stranded tinned copper

Insulation:

- PVC Insulated

Shield:

- Tinned copper braid shield, 75% shield coverage

Jacket:

- Gray PVC

Applications

- Used for computers, communications, instrumentation, sound, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise

Standards

- NEC Article 800
- UL 444
- UL 758
- AWM Style 2095
- 75°C
- 300 Volts

COLOR CODE CHART	
Pairs	Color
1	Black
2	White
3	Green
4	Blue

Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
D111802	18	2	16x30 TC	.016"	.032"	.252"	19
D111803	18	3	16x30 TC	.016"	.032"	.264"	25
D111804	18	4	16x30 TC	.016"	.032"	.286"	31

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.