



PVC Jacket, PVC/Nylon Insulation, 90°C-Dry/75°C-Wet - 600 Volt - UL Type TC-ER*, E-1 Color Code

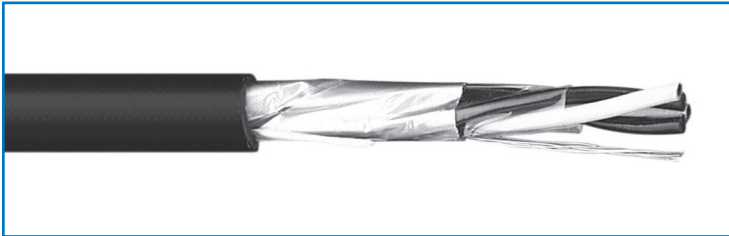

Product Construction

Conductor:

- Fully annealed stranded bare copper per ASTM B3
- Class B stranding per ASTM B8

Insulation:

- Flame-retardant Polyvinyl Chloride (PVC) with nylon

Shield:

- Aluminum/polymer tape

Drain Wire:

- Stranded, tinned copper

Jacket:

- Lead-free, flame-retardant, sunlight-resistant Polyvinyl Chloride (PVC)

Applications

- In all raceways, or direct burial
- In wet or dry locations
- Class 1, Division 2 industrial hazardous locations per NEC

Standards

- UL 1581
- UL 83 NEC Type THHN/THWN conductors
- IEEE 1202
- RoHS compliant
- *UL 1277 Type TC-ER for 3 or more conductors

COLOR CODE CHART

Cond. #	Color
1	Black
2	White
3	Red

Part #	AWG	Conductors	Jacket Thickness	Nom. O.D.	Lbs./M'
A171802	18	2	.045"	.280"	40
A171803	18	3	.045"	.290"	50
A171602	16	2	.045"	.300"	52
A171603	16	3	.045"	.320"	64
A171402	14	2	.045"	.328"	68

*Fittings are available for these products.

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.

*ER Rating only applies to 3 conductors or more