


## 90°C UL/CSA Type SJTOW-300 Volt

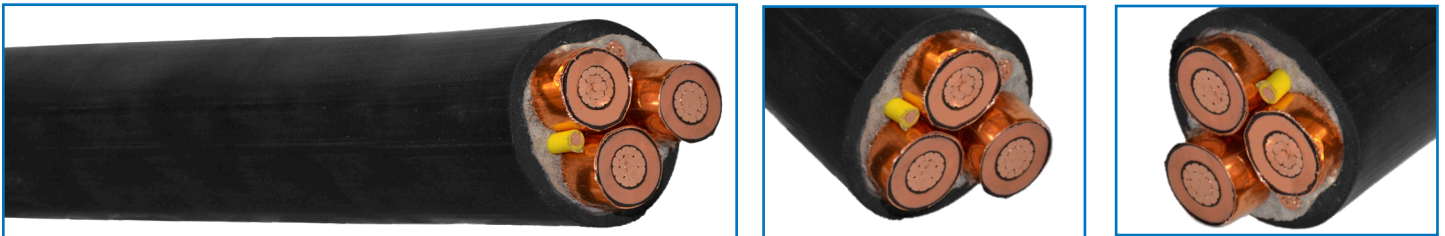

### Product Construction

Conductor:

- Stranded Bare copper

Insulation:

- Premium-grade PVC

Jacket:

- Gray PVC

### Applications

- Portable tools
- Motors
- Floor maintenance equipment
- Hospital equipment
- Sound equipment
- Washing machines
- Portable lights
- Lamps and similar equipment

### Standards

- UL Flexible Cord-UL Subject 62
- MSHA Approved (where applicable)
- CSA
- RoHS Compliant

COLOR CODE CHART	
Cond. #	Color
1	Black
2	White
3	Green

Part #	AWG	Conductors	Stranding	Nom O.D.	Lbs./M'
BTJ1802-06	18	2	16/30	.290"	42
BTJ1803-06	18	3	16/30	.305"	54
BTJ1603-06	16	3	26/30	.330"	70
BTJ1403-06	14	3	41/30	.365"	92
BTJ1203-06	12	3	65/30	.430"	132

Note: The information in this specification sheet is approximate and subject to standard industry and manufacturer tolerances. Please verify specific requirements with your Omni Cable account manager.