



Multi-Conductor-80°C, Unshielded-300 Volt/600 Volt, PVC Insulation-PVC Jacket

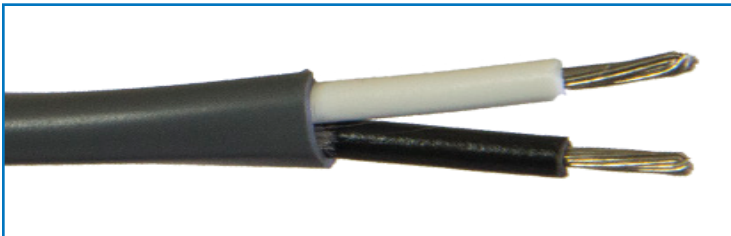

Product Construction

Conductor:

- Tinned copper
- 2 & 3 conductors-300 Volt
- 4+ conductors-600 Volt

Insulation:

- PVC insulated with cabled conductors

Jacket:

- Gray PVC

Applications

- Applications include computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise

Standards

- UL Rated-80°C
- Suggested Working Voltage:: 600 Volt

COLOR CODE CHART

Cond.#	Color	Cond.#	Color
1	Black	14	Green/White Stripe
2	White	15	Blue/White Stripe
3	Red	16	Black/Red Stripe
4	Green	17	White/Red Stripe
5	Orange	18	Orange/Red Stripe
6	Blue	19	Blue/Red Stripe
7	White/Black Stripe	20	Red/Green Stripe
8	Red/Black Stripe	21	Orange/Green Stripe
9	Green/Black Stripe	22	Black/White/Red Stripe
10	Orange/Black Stripe	23	White/Black/Red Stripe
11	Blue/Black Stripe	24	Red/Black/White Stripe
12	Black/White Stripe	25	Green/Black/White Stripe
13	Red/White Stripe		

Instrumentation Cable



Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
D91602	16	2	19x29 TC	.023"	.032"	.266"	39
D91603	16	3	19x29 TC	.023"	.032"	.283"	52.4
D91604	16	4	19x29 TC	.031"	.045"	.382"	88
D91605	16	5	19x29 TC	.031"	.045"	.417"	109
D91607	16	7	19x29 TC	.031"	.045"	.458"	143
D91608	16	8	19x29 TC	.031"	.045"	.496"	170
D91609	16	9	19x29 TC	.031"	.045"	.533"	177
D91612	16	12	19x29 TC	.031"	.060"	.627"	251
D91615	16	15	19x29 TC	.031"	.060"	.694"	307
D91619	16	19	19x29 TC	.031"	.065"	.740"	363
D91625	16	25	19x29 TC	.031"	.065"	.879"	485

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.

*Ring Band Striping