


Multi-Conductor, Overall Aluminum Shield, Polyethylene Insulation, 600 Volt AWM, 150 Volt CL2

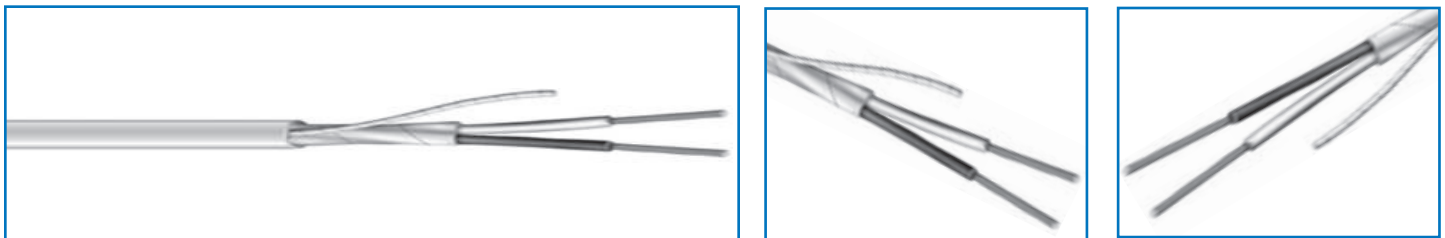

Product Construction

Conductor:

- Stranded tinned copper

Insulation:

- Polyethylene Insulated, twisted Pair

Shield:

- 100% aluminum/polyester with stranded tinned copper drain wire

Jacket:

- Gray PVC

Applications

- Paired cables allow balanced signal transmission which results in lower crosstalk through common mode rejection
- Due to the improved noise immunity of twisted pairs, they generally permit higher data speeds than multi-conductor cables

Standards

- CEC CM CL2
- CEC CM
- 600 Volt AWM
- 80°C rated

COLOR CODE CHART	
Cond. #	Color
1	Black & Clear

Part #	AWG	Stranding	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
D11402	14	19x29	.032"	.035"	.348"	59

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.