Multi-conductor, Unshielded-300 Volt, PVC Insulation-80°C

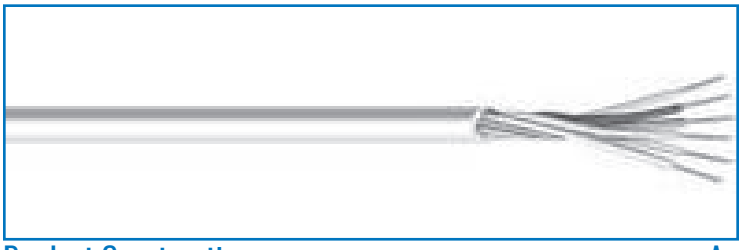


Product Construction

Conductor:
- Tinned copper
- 2 & 3 conductors-300 Volt
- 4 + conductors-600 Volt

Insulation:
- PVC Insulated with cabled conductors

Jacket:
- Gray PVC

Applications

- Applications include computers, communications, instrumentation, sound, control, audio, and data transmission
- Designed to protect signal integrity under critical conditions by reducing hum, noise, and crosstalk

Standards

- Voltage: 300 Volt
- UL Listed: 80°C

COLOR CODE CHART			
Cond.#	Color	Cond.#	Color
1	Black	7	Orange
2	White	8	Yellow
3	Red	9	Purple
4	Green	10	Gray
5	Brown	11	Pink
6	Blue	12	Tan

Instrumentation Cable

Part #	AWG	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
D92002	20	2	7x28 TC	.010"	.032"	.174"	21
D92004	20	4	7x28 TC	.013"	.032"	.217"	29
D92005	20	5	7x28 TC	.013"	.032"	.239"	40
D92007	20	7	7x28 TC	.013"	.032"	.260"	53
D92009	20	9	7x28 TC	.013"	.035"	.317"	67
D92012	20	12	7x28 TC	.013"	.035"	.338"	88
D92015	20	15	7x28 TC	.013"	.040"	.389"	118

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances. *Ring Band Striping