




Multi-Pair, Overall Aluminum/Polyester Shield, Drain Wire, Plenum

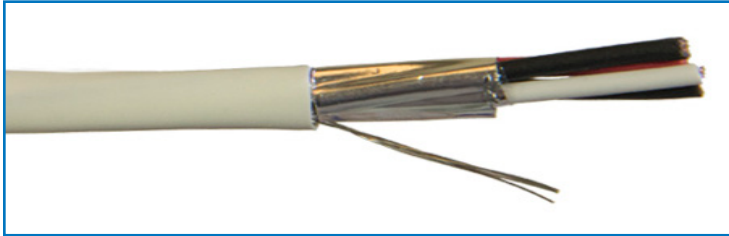

Product Construction

Conductor:

- Twisted pairs with overall foil shield

Insulation:

- Low smoke PVC

Shield:

- Overall aluminum/polyester foil shield with 100% coverage

Jacket:

- Plenum low smoke PVC

Applications

- Signal and control applications

Standards

- CMP/CL3P

COLOR CODE CHART

Cond. #	Color
1	Black & Red
2	Black & White
3	Black & Green

Part #	AWG	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Nom O.D.	Lbs./M'
G131802	18	2	7x26	.009"	.014"	.183"	33.6
G131803	18	3	7x26	.009"	.014"	.267"	49.7

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.