




CL3R/CMR-Shielded Conductors, PVC Insulation & Jacket, 300 Volt, 20 AWG & 18 AWG

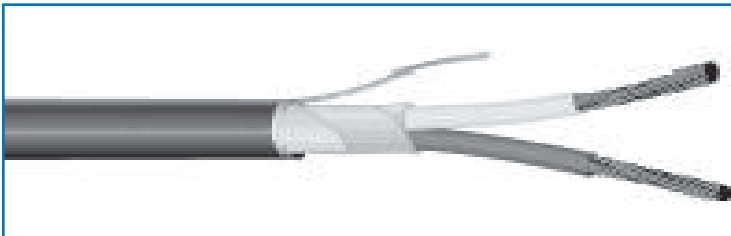

Product Construction

Conductor:

- Stranded bare copper to ASTM B-3, B-8, and B-286

Insulation:

- Color Coded PVC

Shield:

- 100% overall aluminum/polyester
- Stranded tinned copper drain wire

Jacket:

- Gray PVC
- Includes ripcord

Applications

- Power limited control circuits
- Wiring of the following systems
- - Intercom
- - Security
- - Audio
- Suggested Voltage Rating: 300 Volts

Standards

- NEC Article 725 Type CL3R
- NEC Article 800 Type CMR

COLOR CODE CHART			
Cond.#	Color	Cond.#	Color
1	Black	7	Orange
2	Red	8	Yellow
3	White	9	Purple
4	Green	10	Gray
5	Brown	11	Pink
6	Blue	12	Tan

Part #	AWG	Conductors	Insulation Thickness	Jacket Thickness	Nom. O.D.	Lbs./M'
DS12002	20	2	.008"	.015"	.139"	14
DS12003	20	3	.008"	.015"	.148"	18
DS22004	20	4	.008"	.015"	.168"	23
DS11802	18	2	.008"	.015"	.164"	18.9
DS11803	18	3	.008"	.015"	.173"	26.3
DS21804	18	4	.008"	.015"	.191"	32.6
DS21806	18	6	.008"	.015"	.230"	45.2
DS21808	18	8	.008"	.015"	.245"	58.7
DS21810	18	10	.008"	.015"	.285"	75
DS21812	18	12	.008"	.015"	.305"	85

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.

Selling Exclusively Through Electrical Distribution Since 1977 | phone: (800) 292-OMNI | website: omnicable.com

Atlanta • Boston • Charlotte • Chicago • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle • St. Louis • Tampa