




Paired-Stranded-300 Volt, S-R PVC Insulation, Overall Aluminum Shield

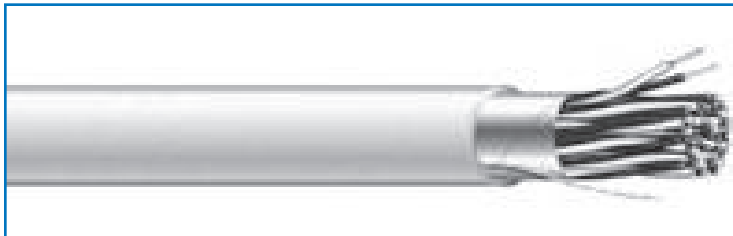

Product Construction

Conductor:

- Tinned copper

Insulation:

- S-R PVC insulation with twisted pairs

Shield/Drain:

- Overall Aluminum-polyester shield with tinned copper drain wire

Jacket:

- Gray PVC

Applications

- Allow balanced signal transmission which results in lower crosstalk through common mode rejection
- Permits higher data speeds than multi-conductor cables

Standards

- UL Listed: 80°C
- Voltage: 300 Volt

COLOR CODE CHART	
Cond.#	Color
1	Black & Red
2	Black & White
3	Black & green

Part #	AWG	Pairs	Stranding	Nom. O.D.	Nominal Capacitance A	Nominal Capacitance B	Lbs./M'
D51803	18	3	19x0092 TC	.341"	39	47	66.3

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.