Web: www.outwater.com
Phone: 1-800-631-8375

OPERATING INSTRUCTIONS FOR LED-RGB36-INLINE

FEATURES:

- 19 Dynamic Modes
- 20 Static Colors
- 256-Grade PWM
- Adjustable Speed
- Adjustable Brightness
- Card Type Remote
- Ultra Slim Design
- Demo Mode
- 1 to 1 Remote Paired
- Auto Save Function

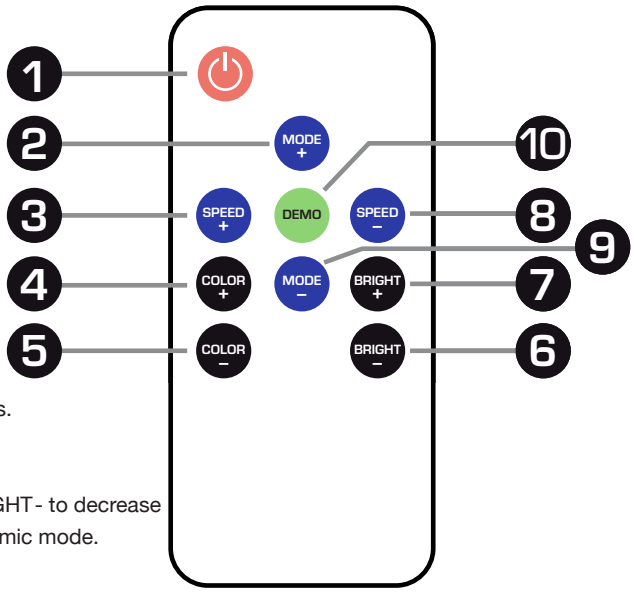

1. Turn ON/Standby Mode

Press this key to turn on unit or switch to standby mode. Unit will turn ON and restore to previous status at powering on moment.

2 | 9. Dynamic Modes Adjust

Switch to dynamic mode from static color mode, or switch between dynamic modes.

3 | 8. Dynamic Speed Adjust

Adjust the dynamic playing speed. Press SPEED+ to increase the speed and press SPEED- to decrease the speed. The unit will switch to dynamic mode if these keys are pressed in static color mode.

4 | 5. Static Color Adjust

Switch to static color mode from dynamic mode, or switch between different static colors.

6 | 7. Brightness Adjust

Adjust static color brightness. Press BRIGHT+ to increase the brightness and press BRIGHT- to decrease the brightness. The unit will switch to static color mode if these keys are pressed in dynamic mode.

10. Demo Mode

Press this key to switch to demo mode. In demo mode the unit will loop play 9 dynamic modes. Each mode will repeat 3 times.

INSTALLATION:

1. Power Supply

This unit accepts a DC5V to 24V power supply. The inner pole polarity is positive and the sleeve in negative. Please select the proper power supply according to the LED application.

2. LED Output

This unit supports common anode connection LED products. The mark indicates the common connection node. The peak output current is 4A per channel. Please reduce the load if the main unit is overheating.
CAUTION: DO NOT SHORT CIRCUIT THE LED OUTPUT. THIS MAY LEAD TO PERMANENT DAMAGE!

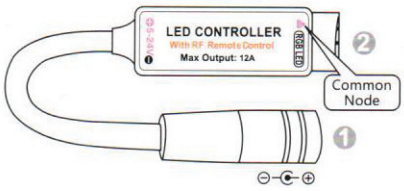

3. Remote Control

Please pull out the insulated part before using. The RF wireless remote signal can pass through barriers, so it's not necessary to aim at the main unit when operating. For proper reception of the remote signal, do not install the main unit in closed metal parts. The remote battery is a 3V CR2025 type. Please only replace with the same type of battery.

SPECIFICATIONS:

Dynamic Mode	19 Modes
Static Color	20 Colors
PWM Grade	256 Levels
Brightness Grade	5 Levels
Speed Grade	10 Levels
Demo Mode	Yes
Working Voltage	DC:5V~24V
Output Current	3-Way, Peak 4A Per Channel
Remote Frequency	433.92 MHz
Remote Distance	> 30m In Open Areas