


900712-10



For patents see [www.cf-pat.com](http://www.cf-pat.com)

**SPECIFICATIONS**

<b>General</b>	When combined with a Universal Base (900638-10 or 900639-10) the PIM Shield Threaded Rod Adapter provides a low passive intermodulation method to secure Cable Support Blocks in high risk PIM zones. The Threaded Rod adapter allows 3/8-in or 10mm diameter threaded rods to be secured in three different directions relative to the base for maximum installation flexibility.
<b>Mounting</b>	Insert the Threaded Rod Adapter into a Universal Base and secure the assembly to structural members using two PIM Shield Cable Straps (900443-16-50 or 900443-27-25) or equivalent.
<b>System PIM performance</b>	IM3 <-100 dBm when tested in accordance with proposed IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus
<b>Material</b>	UV stable, glass filled Nylon
<b>Plastic Base Color</b>	Black
<b>Operating temperature</b>	-40°C to +70°C
<b>Case dimensions</b>	15-inch x 11-inch x 8.0-inch
<b>Case weight</b>	7.8 lb.
<b>Qty per case</b>	10 kits of 10

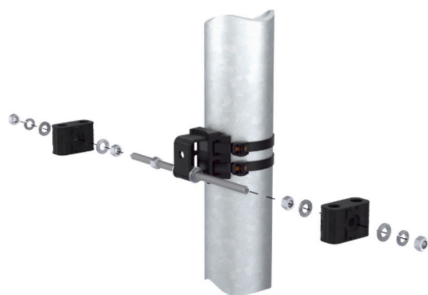

Threaded Rod Adapter with Universal Round Member base 900638-10



Threaded Rod Adapter with Universal Angle Adapter base 900639-10