
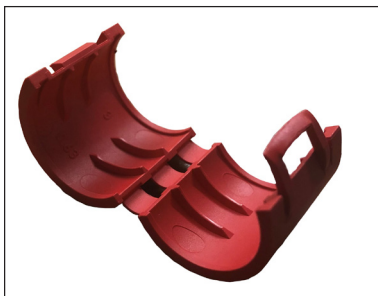


Ruggedized Cable Accessories Color Coded Cuffs


Siemon Color Coded Cuffs (CCC), offer telecom installers an updated means to identify carrier equipment with a safe, robust, quick to install, and reliable cable identification system. The injection-molded, single piece design allows for toolless, one-handed installations, even while wearing work gloves, and are designed for outdoor installations.

Designed for 0.5 in nominal coaxial cable located in harsh environments, Siemon's CCCs are composed of chemical resistant materials suitable for ultraviolet exposure, water immersion and ice build-up. A superior alternative to colored electrical tape, Siemon's CCCs are Eco-friendly, durable, and do not require tools, while eliminating field issues associated with tape flags and adhesion.

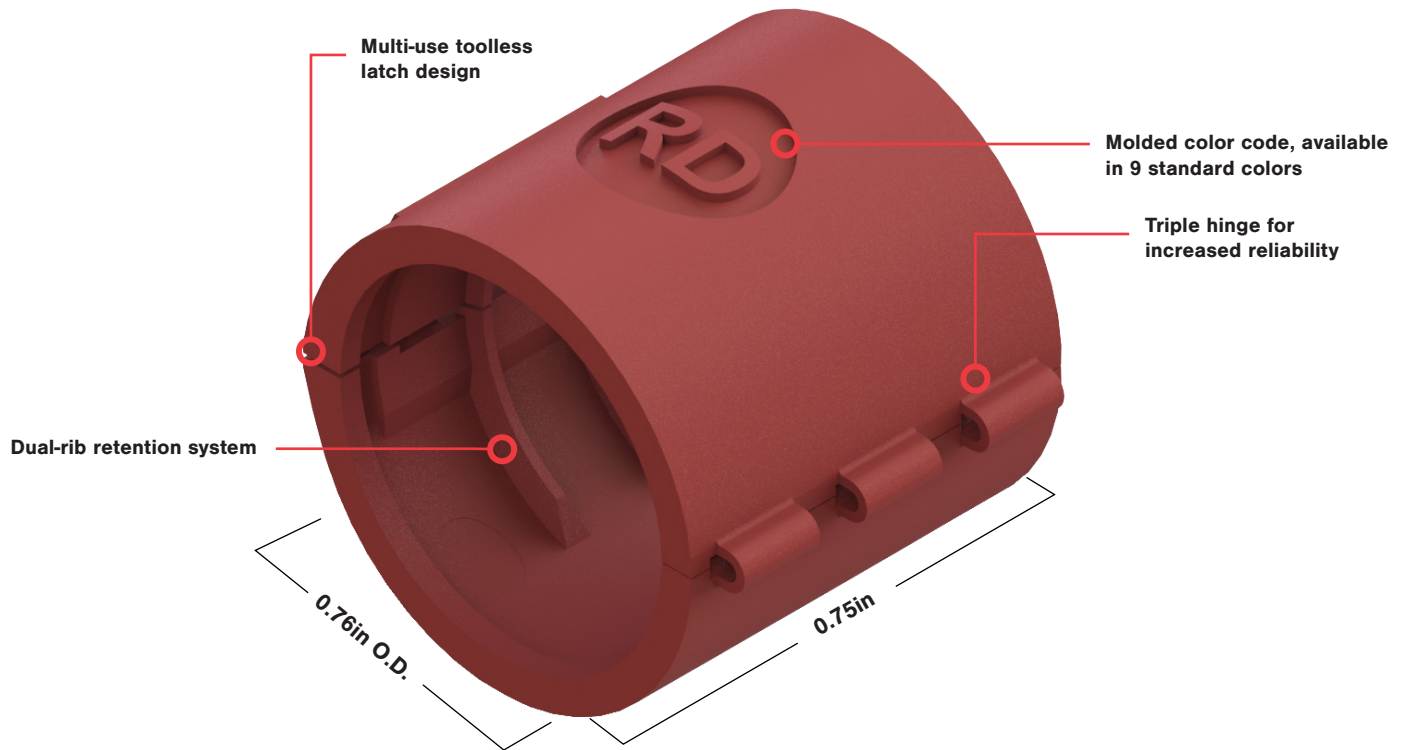

Single Piece Design

The injection-molded, single piece design makes it easy to install cuffs onto cables, even while wearing work gloves.

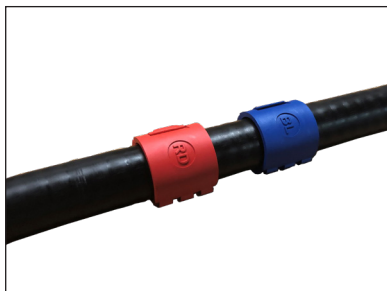

High Visibility Identification

Easy to identify colors separate identical cables for ease of use in the field.



Ruggedized Construction

Designed with UV and environmental rated material to meet 746C (f1) standards.

Product Information

Ordering Information

| | Color | Part Number |
|---|--------|-----------------|
|  | Blue | CCC-0.63-C10-BL |
|  | Brown | CCC-0.63-C10-BN |
|  | Green | CCC-0.63-C10-GN |
|  | Orange | CCC-0.63-C10-OR |
|  | Red | CCC-0.63-C10-RD |
|  | Slate | CCC-0.63-C10-SL |
|  | Violet | CCC-0.63-C10-VT |
|  | White | CCC-0.63-C10-WT |
|  | Yellow | CCC-0.63-C10-YL |

Please contact Customer Service for additional color options.

Mechanical Parameters

| | |
|----------------------------------|--|
| Cable O.D. | 0.63in (16.0mm) (0.5in Nominal Coaxial Cable) |
| Dimensions (installed) | 0.75in (19.1mm) Wide x \varnothing 0.76 in (19.3mm) |
| Retention Force | 20N (4.5 lbf) to 70N (15.7 lbf) based on cable |
| Operating / Storage Temp. | -45C to 70C (-50F to 158F) |
| Cycle Life | 100 Cycles |
| Material | Polypropylene, Flame Retardant, UV Stabilized, PVC Free, RoHS, REACH |
| Flammability Rating | UL 94 V-0 IEC 60695-11-10, -20 |
| Plenum Rating | Designed to meet UL 2043 specifications |
| Outdoor Suitability | Designed to meet UL 746C (f1) specifications |
| UV Resistance | Suitable for indoor or outdoor use |
| Environmental Standards | IEC 60068 Mil-STD-810GH |
| Shelf Life | 20 Years |

Warranty Policy

THE SIEMON COMPANY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF ANY PRODUCT SOLD. The Siemon Company warrants such product to be free from defects in material and workmanship. The Siemon Company will, upon written notice from Buyer of such non-conformity within one (1) year after date of shipment, either replace it F.O.B. original point of delivery, or refund the purchase price, at The Siemon Company's option. The remedies provided herein shall be Buyer's sole and exclusive remedies, and no statement or recommendation not contained herein shall have any force or effect unless in writing and signed by an authorized officer of The Siemon Company. IN NO EVENT WILL THE SIEMON COMPANY BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER ASSERTED IN CONTRACT, TORT, OR OTHERWISE.

If this product should be defective, please contact our Customer Service team at 866-548-5814 or by email at customer_service@siemon.com

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

| | | | | | |
|---|--|---|--|-------------------------------------|--|
| North America P: (1) 860 945 4200 | Asia Pacific P: (61) 2 8977 7500 | Latin America P: (571) 657 1950/51/52 | Europe P: (44) 0 1932 571771 | China P: (86) 215385 0303 | India Middle East P: (971) 4 3689743 |
|---|--|---|--|-------------------------------------|--|

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

WWW.SIEMON.COM

