SBNHH-1D65A

6-port sector antenna, 2x 698–896 and 4x 1695–2360 MHz, 65° HPBW, 2x RET. Both high bands share the same electrical tilt.

- Interleaved dipole technology providing for attractive, low wind load mechanical package

Electrical Specifications

Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2200	2300–2360
Gain, dBi	13.4	13.5	16.5	16.7	17.2	17.5
Beamwidth, Horizontal, degrees	66	61	70	65	62	61
Beamwidth, Vertical, degrees	17.6	15.9	7.1	6.6	6.2	5.5
Beam Tilt, degrees	0–18	0–18	0–10	0–10	0–10	0–10
USLS (First Lobe), dB	16	13	13	13	12	12
Front-to-Back Ratio at 180°, dB	25	27	28	28	27	29
Isolation, Cross Polarization, dB	25	25	25	25	25	25
Isolation, Inter-band, dB	30	30	30	30	30	30
VSWR | Return Loss, dB	1.5 | 14.0	1.5 | 14.0	1.5 | 14.0	1.5 | 14.0	1.5 | 14.0	1.5 | 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300	250	250	250	200
Polarization	±45°	±45°	±45°	±45°	±45°	±45°
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm

Electrical Specifications, BASTA*

Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2200	2300–2360
Gain by all Beam Tilts, average, dBi	13.1	13.1	16.1	16.5	16.7	17.2
Gain by all Beam Tilts Tolerance, dB	±0.5	±0.5	±0.5	±0.3	±0.5	±0.4
Gain by Beam Tilt, average, dBi	0 ° | 13.4 9 ° | 13.1 18 ° | 12.7	0 ° | 13.4 9 ° | 13.1 18 ° | 12.7	0 ° | 16.0 5 ° | 16.2 10 ° | 16.1	0 ° | 16.3 5 ° | 16.5 10 ° | 16.5	0 ° | 16.5 5 ° | 16.8 10 ° | 16.6	0 ° | 17.0 5 ° | 17.3 10 ° | 16.9
Beamwidth, Horizontal Tolerance, degrees	±3.1	±5.4	±2.8	±4	±6.6	±4.6
Beamwidth, Vertical Tolerance, degrees	±1.8	±1.4	±0.3	±0.4	±0.5	±0.3
USLS, beampeak to 20° above beampeak, dB	15	14	15	15	15	14
Front-to-Back Total Power at 180° ± 30°, dB	22	21	26	26	24	25
CPR at Boresight, dB	22	16	22	25	21	22
CPR at Sector, dB	10	6	12	8	5	4

* CommScope® supports NGMN recommendations on Base Station Antenna Standards (BASTA). To learn more about the benefits of BASTA, download the whitepaper Time to Raise the Bar on BSAs.

Array Layout

©2019 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: June 17, 2019

SBNHH-1D65A

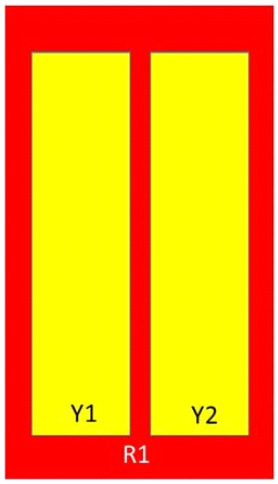

(Sizes of colored boxes are not true depictions of array sizes)

Array	Freq (MHz)	Conns	RET (MRET)	AISG RET UID
R1	698-896	1-2	1	ARxxxxxxxxxxxxxxxxx.1
Y1	1695-2360	3-4	2	ARxxxxxxxxxxxxxxxxx.2
Y2	1695-2360	5-6		

General Specifications

Operating Frequency Band	1695 – 2360 MHz | 698 – 896 MHz
Antenna Type	Sector
Band	Multiband
Performance Note	Outdoor usage | Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN

Mechanical Specifications

RF Connector Quantity, total	6
RF Connector Quantity, low band	2
RF Connector Quantity, high band	4
RF Connector Interface	7-16 DIN Female
Color	Light gray
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Radiator Material	Aluminum | Low loss circuit board
Radome Material	Fiberglass, UV resistant
RF Connector Location	Bottom
Wind Loading, frontal	206.0 N @ 150 km/h 46.3 lbf @ 150 km/h
Wind Loading, lateral	169.0 N @ 150 km/h 38.0 lbf @ 150 km/h
Wind Loading, maximum	396.0 N @ 150 km/h 89.0 lbf @ 150 km/h
Effective Projected Area (EPA), frontal	0.19 m^2 | 2.05 ft^2

©2019 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: June 17, 2019

Effective Projected Area (EPA), lateral	0.16 m^2 | 1.72 ft^2
Wind Speed, maximum	241 km/h | 150 mph

Dimensions

Length	1413.0 mm | 55.6 in
Width	301.0 mm | 11.9 in
Depth	180.0 mm | 7.1 in
Net Weight, without mounting kit	15.2 kg | 33.5 lb

Remote Electrical Tilt (RET) Information

Input Voltage	10–30 Vdc
Internal RET	High band (1) | Low band (1)
Power Consumption, idle state, maximum	2 W
Power Consumption, normal conditions, maximum	13 W
Protocol	3GPP/AISG 2.0 (Multi-RET)
RET Interface	8-pin DIN Female | 8-pin DIN Male
RET Interface, quantity	1 female | 1 male

Packed Dimensions

Length	1589.0 mm | 62.6 in
Width	390.0 mm | 15.4 in
Depth	296.0 mm | 11.7 in
Shipping Weight	26.1 kg | 57.5 lb

Regulatory Compliance/Certifications

Agency	**Classification**
RoHS 2011/65/EU	Compliant by Exemption
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
China RoHS SJ/T 11364-2014	Above Maximum Concentration Value (MCV)

Included Products

BSAMNT-3 — Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

* Footnotes

©2019 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: June 17, 2019

Performance Note	Severe environmental conditions may degrade optimum performance

©2019 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: June 17, 2019

COMMSCOPE®