



Universal Sliding Pipe Mount Kit for 4-1/2 in OD x 63 in pipe

Product Classification

Product Type Pipe mount

Dimensions

Mounting Diameter, maximum	203.2 mm 8 in
Mounting Diameter, minimum	0.0 mm 0 in
Pipe Outer Diameter	114.3 mm 4 1/2 in
Height	1600.2 mm 63.0 in
Length	304.8 mm 12.0 in
Weight	62.6 kg 138.0 lb
Width	304.8 mm 12.0 in


Environmental Specifications

Wind Rating	120 mph (BWS) at 150 ft AGL
Wind Rating Test Method	TIA/EIA-222

General Specifications

Pipe Length	1600.2 mm 63.0 in
Pipe, quantity	1
Tower Taper	Tapered
Includes	Pipe Sliding pipe mount brackets Universal saddle mount
Material Type	Hot dip galvanized steel
Mounting	Angle 60°, 203.2 mm (8 in) Angle 90°, 152.4 mm (6 in) Straight or tapered legs up to 203.2 mm (8 in) OD
Note	One 96 in x 8 in panel antenna per sector
Package Quantity	1

Outline Drawing

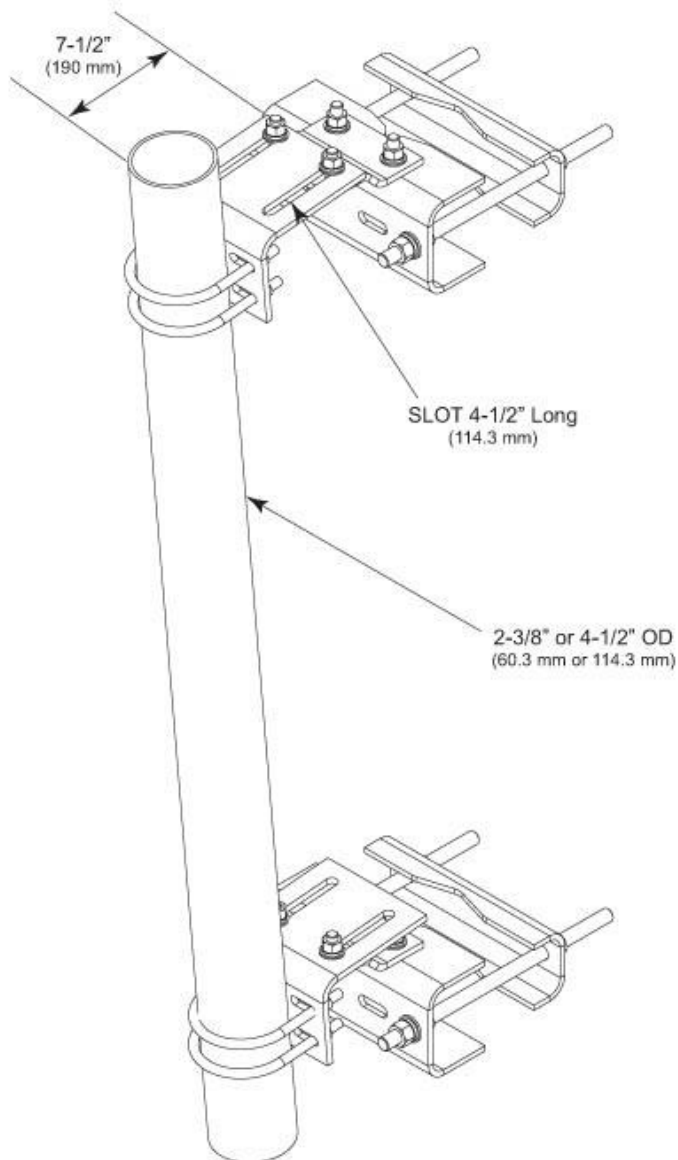

Regulatory Compliance/Certifications

Agency

Classification

PM-SU4-63

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



Included Products

MT-653-63 — Plain End Pipe, 4-1/2 in OD x 63 in

PM-SL4 — Universal Taper Pipe Mount Slider Bracket for 4-1/2 in OD pipe

SM-U2080 — Universal Saddle Mount for straight or tapered legs up to 8 in OD, 8 in angle 60°, or 6 in angle 90°

* Footnotes

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code