

MC-RM1030-3

Universal Ring Mount, 10 in to 30 in OD

Product Classification

Product Type Universal ring mount

Dimensions

Height	254.0 mm		10.0 in
Length	152.4 mm		6.0 in
Mounting Circumference, maximum	2392.7 mm		94.2 in
Mounting Circumference, minimum	797.6 mm		31.4 in
Mounting Diameter, maximum	762.0 mm		30 in
Mounting Diameter, minimum	254.0 mm		10 in
Weight	86.3 kg		190.3 lb
Width	558.8 mm		22.0 in

Environmental Specifications


Wind Rating	140 mph (BWS) at 150 ft AGL		160 mph (3-second gust) at 150 ft AGL using Exposure D per FBC
Wind Rating Criteria	Four 72 in x 8 in panel antennas per sector		
Wind Rating Test Method	TIA/EIA-222		

General Specifications

Product Type	Universal ring mount
Includes	Mount Threaded rod
Material Type	Hot dip galvanized steel
Mounting	Monopole, 254–762 mm (10–30 in) OD
Package Quantity	1
Sectors, quantity	3

MC-RM1030-3

Outline Drawing

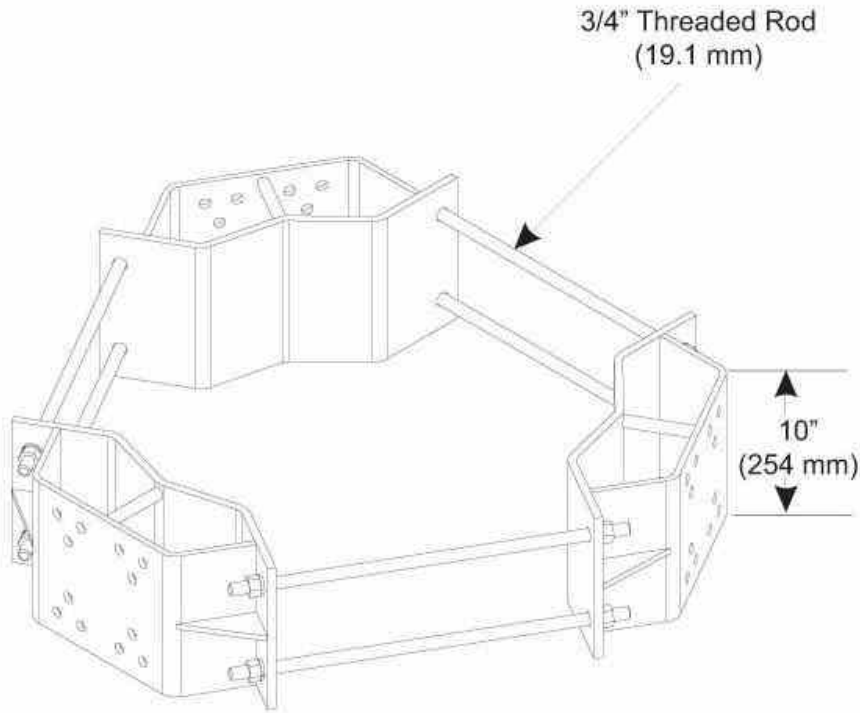

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

* Footnotes

Wind Rating	BWS—Base Wind Speed; FBC—Florida Building Code
-------------	--