


# RSR STRAIGHT CORD GRIP DIMENSIONS

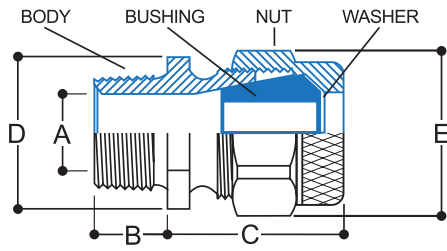

## ALUMINUM AND NICKEL-PLATED ALUMINUM

Conduit Size	RSR Series	Form Size	A Inside Body Dia.	B	C	D Body Hex	E Nut
1/4"	0000	1	0.34	0.44	0.96	0.88	0.96
3/8"	000	1	0.47	0.44	0.96	0.88	0.96
1/2"	1000	1	0.47	0.44	0.95	0.88	0.96
1/2"	100	2	0.61	0.56	1.12	1.00	1.25
1/2"	1200	3	0.62	0.54	1.40	1.25	1.53
3/4"	2100	2	0.61	0.56	1.20	1.12	1.25
3/4"	200	3	0.80	0.57	1.42	1.25	1.53
3/4"	2300	4	0.81	0.57	1.49	1.37	1.72
1"	300	4	0.99	0.62	1.46	1.44	1.72
1"	3500	5	1.06	0.69	1.91	2.00	2.47
1 1/4"	400	5	1.32	0.69	1.80	2.00	2.00
1 1/2"	500	5	1.43	0.69	1.84	2.25	2.47
1 1/2"	5600	6	1.50	0.80	2.39	2.62	2.97
2"	600	6	2.00	0.80	2.39	2.83	2.97
2"	6700	7	1.90	0.80	3.32	4.00	4.20
2 1/2"	700	7	2.36	1.28	3.19	4.00	4.20
3"	8700	7	2.35	1.31	3.07	4.00	4.20
3"	900	9	3.05	1.39	3.14	4.75	4.00
3 1/2"	1150	8	3.25	1.47	4.65	5.36	6.22
4"	1250	9	3.60	1.47	4.86	5.82	6.66

Dimension A is the minimum Inside Body Diameter. Other dimensions are nominal.

Dimension E is cross corners of the nut.