



We put space to work.

Item # \_\_\_\_\_

Job \_\_\_\_\_

# Super Erecta® Shelf Wire Shelving



- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
- **Durable Construction:** Super Erecta shelves and posts are constructed of heavy-gauge carbon steel or Type 304 stainless steel.
- **Choice of Finishes:** Super Erecta Brite™ and chrome-plated for dry storage; Metroseal™ Epoxy (green or gray), and Type 304 stainless steel for corrosive environments; and attractive epoxy color options for merchandising applications.
- **Metroseal:** Proprietary rust-resistant finish is a durable epoxy coating over a protective zinc substrate. Metroseal contains Microban® antimicrobial product protection which continuously fights the growth of bacteria, mold, and mildew that cause stains and odors. 12-year limited warranty against rust and corrosion.
- **Versatile:** Super Erecta® Shelf wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Secure Assembly:** SiteSelect® Posts have a double groove visual guide feature every 8" (203mm), circular grooves at 1" (25mm) increments, and are numbered at 2" (50mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows maximum use of storage cube.
- **Adjustable Feet:** Bolt levelers compensate for surface irregularities.

**Note:** Stainless stationary posts are equipped with stainless steel leveling feet.



Super Erecta Chrome Wire



Super Erecta with Metroseal



Gray Metroseal Epoxy  
Finish with Microban



Green Metroseal Epoxy  
Finish with Microban



**InterMetro Industries Corporation**  
North Washington Street, Wilkes-Barre, PA 18705  
Product Information. U.S. and Canada: 1.800.992.1776  
Outside U.S. and Canada: [www.metro.com/contactus](http://www.metro.com/contactus)

L02-006e  
Printed in U.S.A. 6/20

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2020 InterMetro Industries Corp.




**Super Erecta® Shelf Wire Shelving**

**10.01**



# Super Erecta® Shelf Wire Shelving

## Wire Shelves

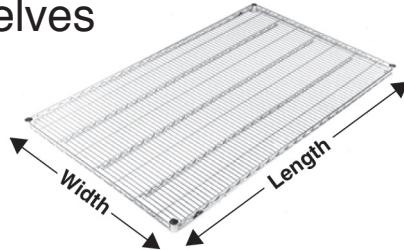

Aluminum Split Sleeve

- See spec sheet 10.14 for epoxy color options.
- Plastic split sleeves are included with each shelf  
Replacements are available: Cat. No. **9985** (bag of 4)
- Aluminum split sleeves are recommended for abusive mobile applications. Sleeves with stainless C-rings must be used for cart wash applications (exceeding 200°F/93°C) and for all autoclave applications.  
Cat. No. **9986Z** (bag of 4 with zinc C-rings)  
Cat. No. **9986S** (bag of 4 with stainless steel C-rings)
- Weight capacity (evenly distributed) per shelf  
800 lbs. (363kg) for lengths of 18" to 48" (457 to 1219mm)  
600 lbs. (272kg) for lengths of 54" (1370mm) or longer
- Weight capacity (evenly distributed) per unit.  
Stationary shelving units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907kg). Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453kg) total. Consult the Metro catalog for caster load ratings.

| Cat. No.<br>Super Erecta Brite | Cat. No.<br>Chrome | Cat. No.<br>Metroseal Green (K3)<br>with Microban | Cat. No.<br>Metroseal Gray (K4)<br>with Microban | Cat. No.<br>Stainless | Nominal Width/Length |          | Approx. Pkd. Wt. |      |
|--------------------------------|--------------------|---------------------------------------------------|--------------------------------------------------|-----------------------|----------------------|----------|------------------|------|
|                                |                    |                                                   |                                                  |                       | (in.)                | (mm)     | (lbs.)           | (kg) |
| 1424BR                         | 1424NC             | 1424NK3                                           | 1424NK4                                          | 1424NS                | 14x24                | 355x610  | 5.3              | 2.4  |
| 1430BR                         | 1430NC             | 1430NK3                                           | 1430NK4                                          | 1430NS                | 14x30                | 355x760  | 6.3              | 2.8  |
| 1436BR                         | 1436NC             | 1436NK3                                           | 1436NK4                                          | 1436NS                | 14x36                | 355x914  | 7.5              | 3.4  |
| 1442BR                         | 1442NC             | 1442NK3                                           | 1442NK4                                          | 1442NS                | 14x42                | 355x1066 | 8.3              | 3.8  |
| 1448BR                         | 1448NC             | 1448NK3                                           | 1448NK4                                          | 1448NS                | 14x48                | 355x1219 | 9.4              | 4.3  |
| 1460BR                         | 1460NC             | 1460NK3                                           | 1460NK4                                          | 1460NS                | 14x60                | 355x1524 | 11.8             | 5.4  |
| 1472BR                         | 1472NC             | 1472NK3                                           | 1472NK4                                          | 1472NS                | 14x72                | 355x1829 | 14.4             | 6.5  |
| -                              | 1818NC             | 1818NK3                                           | 1818NK4                                          | -                     | 18x18                | 457x457  | 5.3              | 2.4  |
| 1824BR                         | 1824NC             | 1824NK3                                           | 1824NK4                                          | 1824NS                | 18x24                | 457x610  | 6.1              | 2.7  |
| 1830BR                         | 1830NC             | 1830NK3                                           | 1830NK4                                          | 1830NS                | 18x30                | 457x760  | 7.1              | 3.2  |
| 1836BR                         | 1836NC             | 1836NK3                                           | 1836NK4                                          | 1836NS                | 18x36                | 457x914  | 8.2              | 3.7  |
| 1842BR                         | 1842NC             | 1842NK3                                           | 1842NK4                                          | 1842NS                | 18x42                | 457x1066 | 9.3              | 4.2  |
| 1848BR                         | 1848NC             | 1848NK3                                           | 1848NK4                                          | 1848NS                | 18x48                | 457x1219 | 10.7             | 4.9  |
| 1854BR                         | 1854NC             | 1854NK3                                           | 1854NK4                                          | 1854NS                | 18x54                | 457x1370 | 11.9             | 5.4  |
| 1860BR                         | 1860NC             | 1860NK3                                           | 1860NK4                                          | 1860NS                | 18x60                | 457x1524 | 13.4             | 6.1  |
| 1872BR                         | 1872NC             | 1872NK3                                           | 1872NK4                                          | 1872NS                | 18x72                | 457x1829 | 14.6             | 6.6  |
| 2124BR                         | 2124NC             | 2124NK3                                           | 2124NK4                                          | 2124NS                | 21x24                | 530x610  | 10.1             | 4.6  |
| 2130BR                         | 2130NC             | 2130NK3                                           | 2130NK4                                          | 2130NS                | 21x30                | 530x760  | 10.5             | 4.8  |
| 2136BR                         | 2136NC             | 2136NK3                                           | 2136NK4                                          | 2136NS                | 21x36                | 530x914  | 10.7             | 4.9  |
| 2142BR                         | 2142NC             | 2142NK3                                           | 2142NK4                                          | 2142NS                | 21x42                | 530x1066 | 11.5             | 5.2  |
| 2148BR                         | 2148NC             | 2148NK3                                           | 2148NK4                                          | 2148NS                | 21x48                | 530x1219 | 11.9             | 5.4  |
| 2154BR                         | 2154NC             | 2154NK3                                           | 2154NK4                                          | 2154NS                | 21x54                | 530x1370 | 12.9             | 5.8  |
| 2160BR                         | 2160NC             | 2160NK3                                           | 2160NK4                                          | 2160NS                | 21x60                | 530x1524 | 13.4             | 6.1  |
| 2172BR                         | 2172NC             | 2172NK3                                           | 2172NK4                                          | 2172NS                | 21x72                | 530x1829 | 14.4             | 6.5  |
| 2424BR                         | 2424NC             | 2424NK3                                           | 2424NK4                                          | 2424NS                | 24x24                | 610x610  | 6.5              | 3.0  |
| 2430BR                         | 2430NC             | 2430NK3                                           | 2430NK4                                          | 2430NS                | 24x30                | 610x760  | 8.3              | 3.8  |
| 2436BR                         | 2436NC             | 2436NK3                                           | 2436NK4                                          | 2436NS                | 24x36                | 610x914  | 10.1             | 4.6  |
| 2442BR                         | 2442NC             | 2442NK3                                           | 2442NK4                                          | 2442NS                | 24x42                | 610x1066 | 11.9             | 5.4  |
| 2448BR                         | 2448NC             | 2448NK3                                           | 2448NK4                                          | 2448NS                | 24x48                | 610x1219 | 14.2             | 6.4  |
| 2454BR                         | 2454NC             | 2454NK3                                           | 2454NK4                                          | 2454NS                | 24x54                | 610x1370 | 16.1             | 7.3  |
| 2460BR                         | 2460NC             | 2460NK3                                           | 2460NK4                                          | 2460NS                | 24x60                | 610x1524 | 18.0             | 8.2  |
| 2472BR                         | 2472NC             | 2472NK3                                           | 2472NK4                                          | 2472NS                | 24x72                | 610x1829 | 21.4             | 9.7  |


**Note:** The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.

**Note:** The following restrictions apply to shelving units that utilize 14" (355mm) wide shelves:  
Free-standing units: Units taller than 63" (1600mm) must be properly fastened to the floor or wall using Metro foot plates or wall brackets.  
Mobile units: maximum allowable post height is 54" (1370mm).

## SiteSelect® Posts

**Stationary Posts** - Equipped with a leveling bolt to account for uneven floors.

- Height includes leveling bolt (completely tightened) and post cap. Leveling bolt can be adjusted 0.5" (13mm).
- Foot plates may be ordered separately and installed in place of leveling foot.
- Replacement leveling bolts: Zinc Cat. No. **RPF04-004**, Stainless Steel Cat. No. **RPF04-004C**
- Replacement post cap for standard posts: Black Cat. No. **RPC06-035**




SiteSelect Posts feature double grooves every 8" (203mm) to aid assembly.

| Cat. No.<br>Chrome | Cat. No.<br>Metroseal Green<br>(K3) with Microban | Cat. No..<br>Metroseal Gray<br>(K4) with Microban | Cat. No.<br>Stainless Steel | Actual Height |      | Approx. Pkd. Wt. |      |
|--------------------|---------------------------------------------------|---------------------------------------------------|-----------------------------|---------------|------|------------------|------|
|                    |                                                   |                                                   |                             | (in.)         | (mm) | (lbs.)           | (kg) |
| <b>7P</b>          | <b>7PK3</b>                                       | <b>7PK4</b>                                       | -                           | 7.375         | 187  | 0.5              | 0.3  |
| <b>13P</b>         | <b>13PK3</b>                                      | <b>13PK4</b>                                      | <b>13PS</b>                 | 14.375        | 365  | 1                | 0.5  |
| <b>27P</b>         | <b>27PK3</b>                                      | <b>27PK4</b>                                      | <b>27PS</b>                 | 28.375        | 720  | 1.75             | 0.75 |
| <b>33P</b>         | <b>33PK3</b>                                      | <b>33PK4</b>                                      | <b>33PS</b>                 | 34.375        | 873  | 2                | 0.9  |
| <b>54P</b>         | <b>54PK3</b>                                      | <b>54PK4</b>                                      | <b>54PS</b>                 | 54.4375       | 1382 | 3                | 1.4  |
| <b>63P</b>         | <b>63PK3</b>                                      | <b>63PK4</b>                                      | <b>63PS</b>                 | 62.4375       | 1585 | 3.5              | 1.6  |
| <b>74P</b>         | <b>74PK3</b>                                      | <b>74PK4</b>                                      | <b>74PS</b>                 | 74.5          | 1892 | 4                | 1.8  |
| <b>86P</b>         | <b>86PK3</b>                                      | <b>86PK4</b>                                      | <b>86PS</b>                 | 86.5          | 2197 | 5                | 2.3  |
| <b>*96P</b>        | -                                                 | -                                                 | -                           | 96.5          | 2450 | 5.5              | 2.5  |

\*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.



Stationary Post



Post for Stem Caster

## Mobile Posts (For use with Stem Casters)

- Height includes post cap.

| Cat. No.<br>Chrome | Cat. No.<br>Metroseal Green<br>(K3) with Microban | Cat. No.<br>Metroseal Gray<br>(K4) with Microban | Cat. No.<br>Stainless Steel | Actual Height |      | Approx. Pkd. Wt. |      |
|--------------------|---------------------------------------------------|--------------------------------------------------|-----------------------------|---------------|------|------------------|------|
|                    |                                                   |                                                  |                             | (in.)         | (mm) | (lbs.)           | (kg) |
| <b>13UP</b>        | <b>13UPK3</b>                                     | <b>13UPK4</b>                                    | <b>13UPS</b>                | 13.75         | 349  | 1                | 0.5  |
| <b>27UP</b>        | <b>27UPK3</b>                                     | <b>27UPK4</b>                                    | <b>27UPS</b>                | 27.75         | 704  | 1.75             | 0.75 |
| <b>33UP</b>        | <b>33UPK3</b>                                     | <b>33UPK4</b>                                    | <b>33UPS</b>                | 33.75         | 857  | 2                | 0.9  |
| <b>54UP</b>        | <b>54UPK3</b>                                     | <b>54UPK4</b>                                    | <b>54UPS</b>                | 53.8125       | 1366 | 3                | 1.4  |
| <b>63UP</b>        | <b>63UPK3</b>                                     | <b>63UPK4</b>                                    | <b>63UPS</b>                | 61.8125       | 1570 | 3.5              | 1.6  |
| -                  | <b>70UPK3</b>                                     | <b>70UPK4</b>                                    | -                           | 69.75         | 1771 | 3.75             | 1.7  |
| <b>74UP</b>        | <b>74UPK3</b>                                     | <b>74UPK4</b>                                    | <b>74UPS</b>                | 73.875        | 1876 | 4                | 1.8  |
| <b>86UP</b>        | <b>86UPK3</b>                                     | <b>86UPK4</b>                                    | <b>86UPS</b>                | 85.875        | 2181 | 4.5              | 2.0  |

## Special Length Posts

Cut posts are available. Consult your Metro representative for more information.



Staked Post



Swaged Post

## Staked Posts (For use with Truck Dollies)

- Each post connects to the truck dolly through the stem receptacle. The stem receptacle is staked into the bottom of the post to ensure a durable connection in abusive mobile applications. Each includes a leveling/connecting bolt.

| Cat. No.<br>Chrome | Cat. No.<br>Stainless Steel | Actual Height |      | Approx. Pkd. Wt. |      |
|--------------------|-----------------------------|---------------|------|------------------|------|
|                    |                             | (in.)         | (mm) | (lbs.)           | (kg) |
| <b>54P-STKD</b>    | <b>54PS-STKD</b>            | 54.4375       | 1382 | 3                | 1.4  |
| <b>63P-STKD</b>    | <b>63PS-STKD</b>            | 62.4375       | 1585 | 3.5              | 1.6  |
| <b>74P-STKD</b>    | <b>74PS-STKD</b>            | 74.5          | 1892 | 4                | 1.8  |

## Swaged Posts (For use with Stem Casters in Cart Wash Applications)

- Each post has an aluminum cap swaged into the top of the post.

| Cat. No.<br>Stainless Steel | Actual Height |      | Approx. Pkd. Wt. |      |
|-----------------------------|---------------|------|------------------|------|
|                             | (in.)         | (mm) | (lbs.)           | (kg) |
| <b>33UPS-SW</b>             | 33.75         | 857  | 2                | .9   |
| <b>54UPS-SW</b>             | 53.8125       | 1366 | 3                | 1.4  |
| <b>63UPS-SW</b>             | 61.8125       | 1570 | 3.5              | 1.6  |

Job \_\_\_\_\_



We put space to work.

# Super Erecta Shelf®

## Wire Shelving

### Super Wide Shelving

- **High-density Storage:** Super Wide shelves have a greater storage area for holding large quantities of supplies, especially large, bulky objects, providing maximum storage in minimum space.

- **Load Capacity (evenly distributed) per shelf:**

Depths: 30" and 36" (760 and 914mm)

800 lbs. (363kg) for lengths 48" (1219mm) or shorter.

600 lbs. (272kg) for lengths 54" (1370mm) or longer.

| Cat. No.<br>Chrome | Cat. No.<br>Metroseal Green<br>(K3) with<br>Microban | Cat. No..<br>Metroseal Gray<br>(K4) with<br>Microban | Cat. No.<br>Stainless Steel | Nominal<br>Width/Length |          | Approx. Pkd.<br>Wt. |      |
|--------------------|------------------------------------------------------|------------------------------------------------------|-----------------------------|-------------------------|----------|---------------------|------|
|                    |                                                      |                                                      |                             | (in.)                   | (mm)     | (lbs.)              | (kg) |
| 3036NC             | 3036NK3                                              | 3036NK4                                              | 3036NS                      | 30x36                   | 760x914  | 14.2                | 6.4  |
| 3048NC             | 3048NK3                                              | 3048NK4                                              | 3048NS                      | 30x48                   | 760x1219 | 17.7                | 8.0  |
| 3060NC             | 3060NK3                                              | 3060NK4                                              | 3060NS                      | 30x60                   | 760x1524 | 20.2                | 9.2  |
| 3072NC             | 3072NK3                                              | 3072NK4                                              | 3072NS                      | 30x72                   | 760x1829 | 22.7                | 10.3 |
| 3636NC             | 3636NK3                                              | -                                                    | 3636NS                      | 36x36                   | 910x914  | 16.7                | 7.6  |
| 3648NC             | 3648NK3                                              | -                                                    | 3648NS                      | 36x48                   | 910x1219 | 21.6                | 9.8  |
| 3660NC             | 3660NK3                                              | -                                                    | 3660NS                      | 36x60                   | 910x1524 | 26.4                | 12.0 |
| 3672NC             | 3672NK3                                              | -                                                    | 3672NS                      | 36x72                   | 910x1829 | 31.6                | 14.3 |

**Note:** The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.



### Foot Plates

- Use to bolt units to the floor, or when a broader, more stable foot is desired. Foot plates also help to protect floors by distributing the point load of the shelving unit across a larger contact point.
- Foot plates (completely tightened) add .125" (3mm) to the specified heights of each stationary post on the table.

Zinc Cat. No. **9993Z**

Stainless Steel Cat. No. **9993S**



### "S" Hook

- Used to add on shelving units with only two posts required. Order two per shelf level.

Cat. No. **9995Z**



an Ali Group Company



The Spirit of Excellence