


EPR Insulation-CPE Jacket, 15 kV, EPR/Copper Tape Shield, UL Type MV-105, 133% Insulation Levels

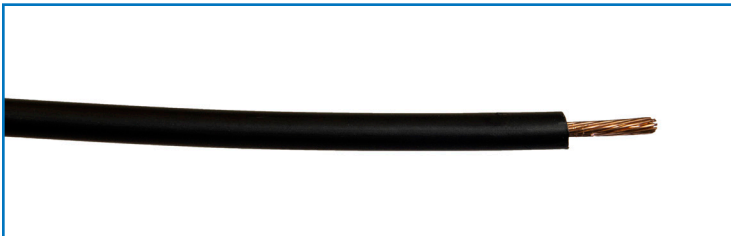

Product Construction

Conductor:

- 2 AWG through 1000 kcmil annealed bare copper compact Class B strand

Extruded Strand Shield:

- Extruded thermoset semi-conducting stress-control layer over conductor

Insulation:

- Lead-free Ethylene Propylene Rubber (EPR) insulation, contrasting in color to the black semi-conducting shield layers

Extruded Insulation Shield:

- Thermoset semi-conducting polymeric layer free stripping from insulation

Metallic Shield:

- 5 mil annealed copper tape with an overlap of 25%

Jacket:

- Flame-retardant, moisture and sunlight resistant Chlorinated Polyethylene (CPE)

Applications

- Superior performance in petrochemical plants, pulp and paper mills, sewage and water treatment plants, environmental protection systems, railroads, mines, utility power generating stations, steel mills, textile plants and other industrial three-phase applications
- For use in wet or dry locations when installed in accordance with NEC
- For use in aerial, direct burial, conduit, open tray, and underground duct installations
- For use in direct burial if installed in a system with a ground conductor that is in close proximity, and conforms with NEC 250.4(A)(5)

Features

- Rated at 105°C
- Excellent heat and moisture resistance
- Excellent flame resistance
- Outstanding corona resistance
- Flexibility for easy handling
- Low friction for easy pulling
- High dielectric strength
- Low moisture absorption
- Electrical stability under stress
- Low dielectric loss
- Chemical-resistant
- Meets cold bend test at -35°C
- 105°C rating for continuous operation
- 140°C rating for emergency overload conditions
- 250°C rating for short circuit conditions

Standards

- National Electric Code (NEC)
- UL 1072
- ICEA S-93-639/NEMA WC74
- ICEA S-97-682
- AEIC CS8
- UL listed as Type MV-105 for use in accordance with NEC, UL File #E90501
- UL 1685 (Sizes 1/0 AWG and larger) UL Flame Exposure Test
- Sizes 1/0 AWG and larger are listed and marked "Sunlight-Resistant FOR CT USE" in accordance with NEC
- IEEE 1202 (70,000 BTU/hr)/ CSA FT4
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable

Medium Voltage Power Cable



Part #	AWG	Conductors	Conductor Diameter	Insulation Diameter Min.	Insulation Diameter Max.	Jacket Thickness	Nom. O.D.	Lbs./M'
MVEH30201	2	1	.270"	.710"	.800"	.080"	.990"	655
MVEH30101	1	1	.310"	.745"	.830"	.080"	1.02"	730
MVEH31/001	1/0	1	.340"	.780"	.865"	.080"	1.06"	820
MVEH32/001	2/0	1	.380"	.820"	.905"	.080"	1.10"	933
MVEH33/001	3/0	1	.430"	.865"	.955"	.080"	1.14"	1072
MVEH34/001	4/0	1	.480"	.920"	1.005"	.080"	1.21"	1248
MVEH325001	250	1	.530"	.970"	1.060"	.080"	1.25"	1402
MVEH335001	350	1	.620"	1.070"	1.155"	.080"	1.35"	1778
MVEH350001	500	1	.740"	1.190"	1.275"	.080"	1.47"	2325
MVEH375001	750	1	.910"	1.370"	1.460"	.080"	1.65"	3250

*Accessories are available for all medium voltage products.